

## Connection kit for joining self limiting heating cables to cold tails

### Cold tail fitting set:

- 1 crimp tube type (16/5, L=125 mm);
- 1 crimp tube type (10/3, L=20 mm);
- 2 crimp tube type (3/1, L=15 mm);
- 3 squeeze connection tubes type fitcrimp.

### Sealing set for cable-end:

- 1 crimp tube type (15/5, L=60 mm);
- 1 crimp tube type (10/3, L=25 mm).


### Practical fitting instructions:

A temperature of  $150^{\circ} \pm 30^{\circ}\text{C}$  is necessary to shrink the crimp tubes. A hot air gun with a temperature regulator is the most appropriate tool. However, a blow torch with a moderate flame or a gas lighter can also be used.


### Preparation of the heating cable



1. Remove the outer sheath from the cable with a wire stripper.



2. Pull the screen back over the cable and cut away, (with a knife) the conductor insulation.




3. Using side-cutting pliers, carefully cut the inner layer of the material between the two conductors away, making sure not to damage them when doing so.




4. Pull the conductors to the side and cut the inner layer away so that it is flush with the first layer of insulation.




5. Twist the conductors so that the remaining material loosens.




6. Carefully cut away any remaining material and trim the tips of the conductors. Cut a small triangle in the inner material as shown in the diagram.



7. Untangle the screen and then twist it together. Position it as shown in the diagram. Make sure that none of the earth wires are in contact with the conductors.




8. Mount the crimp tube, type (3/1, L=15mm) onto the conductors.




9. Crimp the tubes.




10. Pull the crimp tube, type (10/3, L=20mm) over the cable so that it meets the outer sheath at the one end and protrudes at least 5mm out over the inner layer of material at the other end.



11. Crimp the tube.



12. Press the tube with flat bit pliers between the conductors until glue is visible.






### Preparation of the cold tail:

All authorised electrical heating cables with an earthing wire can be used.


1. Remove 50 mm of the outer sheath of the cable.
2. Free the conductors from the filler.
3. Cut away 25 mm from each conductor and remove 7 mm of the sheath from each of them.
4. Pull the crimp tube (type 16/5, L=125 mm) over the cold tail.

### Assembling

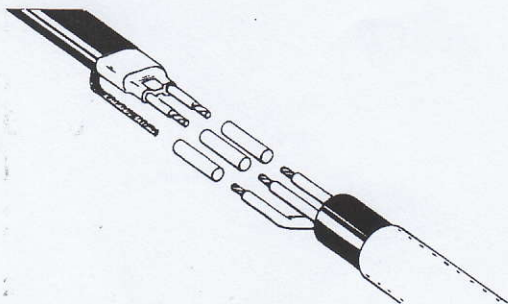


1. The conductors are joined together with the help of squeeze connection tubes. Warm the squeeze connection tubes until the tubes crimp and the glue flows.
2. Join the two earth wires together with the remaining squeeze connection tube.
3. Place the crimp tube (type 16/5, L=125 mm) over the joint in a central position.
4. Crimp the tube from the middle to the edges so that the glue is clearly visible.
5. Allow the join to cool down to body temperature before measuring the cable for its ohmic value.

### Seal the end of the heating cable



1. Cut the cable to the desired length for installation. Pull the crimp tube (type 10/3, L=60 mm).




6. Crimp the tube down and flatten the end with flat bit pliers so that the glue is visible.




2. Remove the outer sheath from the cable.




7. Pull the screen back over the cable and secure with the provided assembly wire.




3. Pull the screen back over the cable..




8. Pull the crimp (type 15/5, L=60mm) over the cable and keep it under the hot air stream.



4. Cut away 25 mm from the inner part of cable.



9. Crimp the tube down and pinch the end with flat bit pliers so that the glue is clearly visible.



5. Pull the crimp tube (type 10/3, L=25 mm) over the remaining inner part of the cable.

**Comfort  
Heat**

[www.comforheat.eu](http://www.comforheat.eu)

Comfort Heat UAB  
Phone: + 370 5 2704596  
Fax: + 370 5 2704498  
Mobile: + 370 688739700  
Laisves av. 123  
LT- 06118 Vilnius, Lithuania  
[info@comforheat.eu](mailto:info@comforheat.eu)

