





## LINEAL TUBULAR 5W R7S 78mm 220V 360° LED

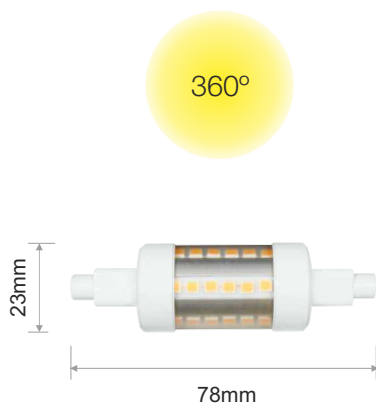

5W  
25.000h



60W  
2.000h

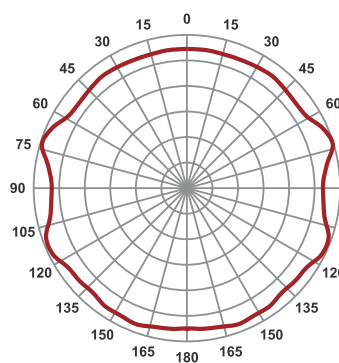

| CODE       | CCT     | LUMENS | CD | POWER | TYPE | VOLTAGE  | ANGLE | PF    | A     | Hz    | LIFETIME | RA | IP |
|------------|---------|--------|----|-------|------|----------|-------|-------|-------|-------|----------|----|----|
| 140026-C3T | 3.000 K | 561    | 55 | 5W    | R7S  | 220-240V | 360°  | > 0,8 | 0,027 | 50/60 | 25.000h  | 80 | 44 |
| 140026-F4T | 4.000 K | 574    | 58 | 5W    | R7S  | 220-240V | 360°  | > 0,8 | 0,027 | 50/60 | 25.000h  | 80 | 44 |



IP44

F

R7S

CE



EMC

CO<sub>2</sub>



100.000  
on off  
LED



+40°C  
-20°C

RoHS  
Compliant

6/30