


HW Device socket, solid

Order number: 7350154

Type: HW30F

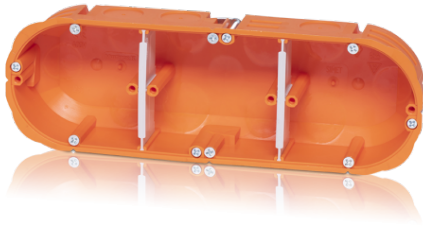

Versatile applications - Solid installation

- Extremely solid material, high wall thickness
- Flexible installation with variable partitions
- With break-outs for easy insertion of cables
- Flame retardant to 960°C

Dimensions

Depth	45 mm
Height	68 mm
Width	210 mm

Properties

Degree of protection (IP)	IP30
Halogen-free	-
Installation type	HW

Technical features

max. cross section	2,5 mm²
Pipe entry M20/M25	12 / 4
Suitable for sheet thickness	3-20 mm

Certificates & standards

Glow wire test	960 °C
----------------	--------