

GIANT EVO LED Lyskastere •



QUALIKO



EN 55015 • EN 61547 • EN 61347-2-13 • EN 60598-1 • EN 61000-3-2

PHILIPS LUMILEDS

EMC [IP65] RoHS

Type	Vare N°	Dimensjoner (mm)	Vekt kg	Lumen (lm)	°Kelvin	Inn Volt (V)	Watt Maks(W)	Strom Faktir	Kartong Dimensjoner (mm)
GIANT EVO 60	BFL060EVO40G	325x90x90h	3,20	6000	4000°	200÷240	60	>0,95	430x270x150
GIANT EVO 120	BFL120EVO40G	325x90x170h	4,70	14155	4000°	200÷240	120	>0,95	430x270x240
GIANT EVO 180	BFL180EVO40G	325x90x250h	5,60	18360	4000°	200÷240	180	>0,95	430x340x330
GIANT EVO 240	BFL240EVO40G	325x90x330h	6,70	28783	4000°	200÷240	240	>0,95	475x430x210
GIANT EVO 300	BFL300EVO40G	325x90x410h	8,40	36053	4000°	200÷240	300	>0,95	615x430x210

*Standard lagervare 90° spredning. Følgende leveres som bestillings-vare 60° eller 40° ikke lagerført må produseres

GIANT Led lyskastere

- Led lyskastere stillbar
- Luxeon 3030 LED
- IP65 Kapsling - Lys-spredning 90° standard
- Driftstemperatur -40°C÷+50°C
- For profesjonell bruk
- CRI >75

LED FLOOD

- Adjustable LED high power flood
- Luxeon 3030 LED
- IP65 enclosure - Light beam 90° standard
- Operating temperature -40°C÷+50°C
- For professional use
- CRI >75

LED-PROJEKTOR


- Einstellbar High Brightness LED-Projektor
- Luxeon 3030 LED
- IP65 - Standard Ausstrahlwinkel 90°
- Betriebstemperatur: -40°C÷+50°C
- Nur für berufliche Anwendung
- CRI >75

PROJECTEUR LED



- Projecteur orientable Led à haute puissance
- Luxeon 3030 LED
- IP65 - Faisceau 90° standard
- Température ambiante de fonctionnement -40°C÷+50°C
- Usage professionnel
- CRI >75

PROYECTOR LED

- Projector LED ajustable de alta potencia
- Luxeon 3030 LED
- Caja IP65 - Haz luminoso 90° estandar
- Temperatura de funcionamiento -40°C÷+50°C
- Para uso profesional
- CRI >75

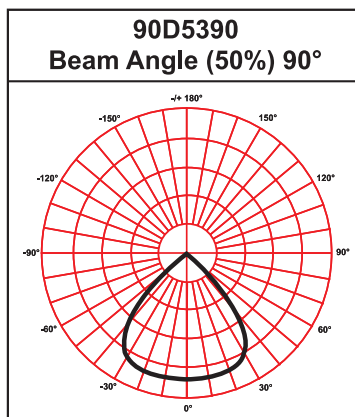

STANDARD



PÅ Firespørsel



Vinkling mikrojustering