

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.

LANDA[®]
illuminotecnica

Lako

Article 409.....
Product type Bollard
Body material: Die-casting aluminium EN47100 and extruded aluminium AW 6060, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation.
Opal polycarbonate UV protection and silicon gasket
Screws in A2 stainless steel
Colours available: Metalgrey and Graphite
No driver required - 220-240V AC Dimmable: NO

IK08
IP65
960°C

Powered by
Seoul Semiconductor 2525

7W 220-240V AC

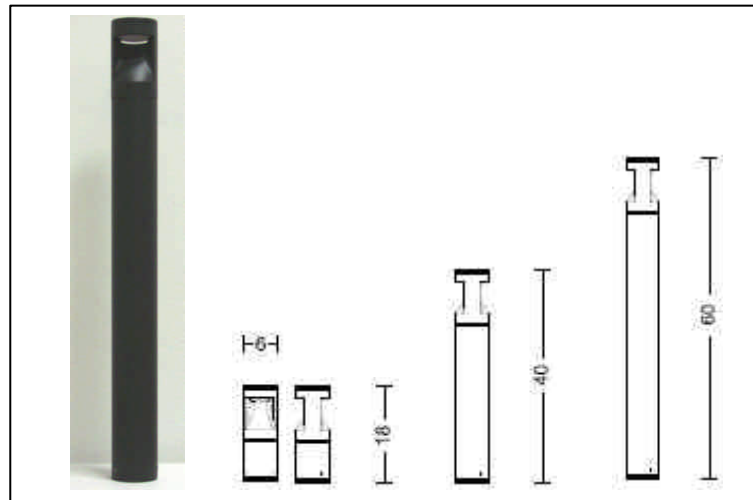


Colours available:

Graphite




Metalgrey



Photometric data available at
www.landa.it

Light effect:






Technical data sheet




All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.

LANDA[®]
illuminotecnica

Lako Directional light effect

Dimension	Code	W - LM	°K	transformer	ra
	409.018L7HX1	7 - 600	3000	Not required 220-240V AC	80
	409.040L7HX1	7 - 600	3000	Not required 220-240V AC	80
	409.060L7HX1	7 - 600	3000	Not required 220-240V AC	80

Bi-directional light effect

Dimension	Code	W - LM	°K	transformer	ra
	409.018L7HX2	7 - 600	3000	Not required 220-240V AC	80
	409.040L7HX2	7 - 600	3000	Not required 220-240V AC	80
	409.060L7HX2	7 - 600	3000	Not required 220-240V AC	80