

RK 750 V Plastisolert koblingsledning.

RK 750V 10 G/G

H07V-K

Nexans ref.: 10022602

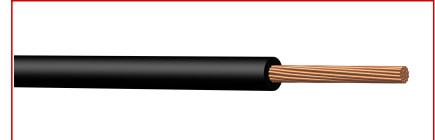
El. nummer: 1050576

GTIN (EAN 13): 7045210016659


Plastisolert koblingsledning

Beskrivelse

Koblingsledning med mangetrådet kobberleder. Anbefalt brukt der det er hesiktsmessig å benytte fleksible ledninger, f.eks ved tavlebygging.



Standarder

Internasjonal EN 50265; HD 21.3;
IEC 60332-1**Norsk** NEK-HD 21.3Blyfri
JaNormert spenning i 3 fase systemer U₀/
U
450 / 750 VMax.conductor temp.in service
70 °CRoHS conform
Ja

RK 750 V Plastisolert koblingsledning.

RK 750V 10 G/G
Nexans ref.: 10022602

Egenskaper

Konstruksjonsegenskaper

Kappefarge	Gul/grønn
Lederform	Mangetrådet
Ledermateriale	Glødd kobber
Isolasjon	Polyvinylklorid - PVC
Blyfri	Ja

Dimensjonsegenskaper

Lederdiameter	4,2 mm
Nominell ytre diameter	6,2 mm
Antall ledere	1
Ledertverrsnitt	10 mm ²
Vekt (ca.)	11,5 kg/100m


Elektriske egenskaper

Normert spenning i 3 fase systemer U ₀ /U	450 / 750 V
--	-------------

Bruksegenskaper

Lengde	100 m
Forpakning	Bunt
Maks. tillatt ledertemperatur	70 °C
RoHS conform	Ja


 Blyfri
 Ja

 Normert spenning i 3 fase systemer U₀/
 U
 450 / 750 V

 Max. conductor temp.in service
 70 °C

 RoHS conform
 Ja