


Mira 220 | 19.5 W | asymmetric 70° x 340° | Floor recessed

Round frame for flush-mounted installation

Technical Specifications


Source lamp	LED 19.5 W
Total wattage	23
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	1534 lm (2093 lm*) @ 3000 K
Luminous efficacy	67 lm/W @ 3000 K
McADAM steps	3
Beam	asymmetric 70° x 340°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I




Materials

Body	Die-cast aluminium EN47100
Diffuser	Extra clear tempered glass 19 mm
Finishing	Inox AISI 316L - Inox AISI 316L

Isolux

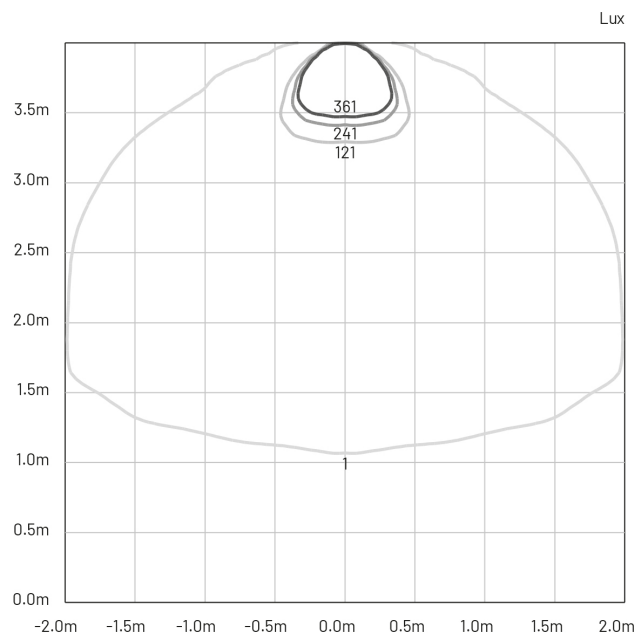

Photometry

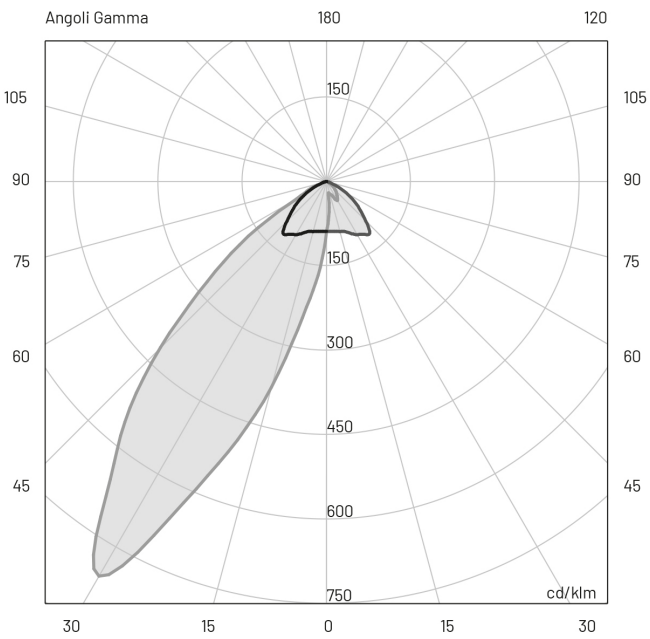

Included accessories

- 2 m length cable H07RN-F
- Housing box

Available accessories

0404M003	Loop-in loop-out IP68
0201001V0400	Non-slip glass
0201001V0200	Sandblasted glass
00KAV04	Set antivandalism screws
0303CA3	Tool for antivandalism screws