



Eye_1 600 | 34 W | flood 45° | Projectors

Also available for ceiling

Technical Specifications

Source lamp	LED 34 W
Total wattage	43
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	3314 lm (4406 lm*) @ 3000 K
Luminous efficacy	88 lm/W @ 3000 K
McADAM steps	3
Beam	flood 45°
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I

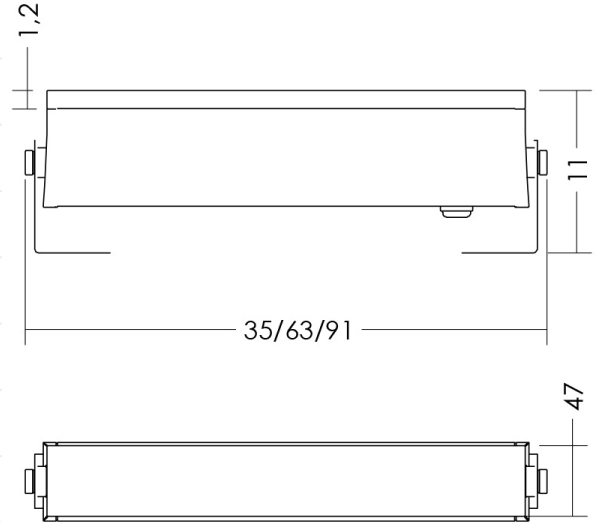


Materials

Body	Extruded aluminium EN AW6060
Diffuser	Extra clear glass
Finishing	Grey - Polyester powder paint

E (lux)

H(m)	lux (3000 K)	Ø(m)
1.00	2658	0.78
2.00	664	1.56
3.00	295	2.34
4.00	166	3.11
5.00	106	3.89

Photometry

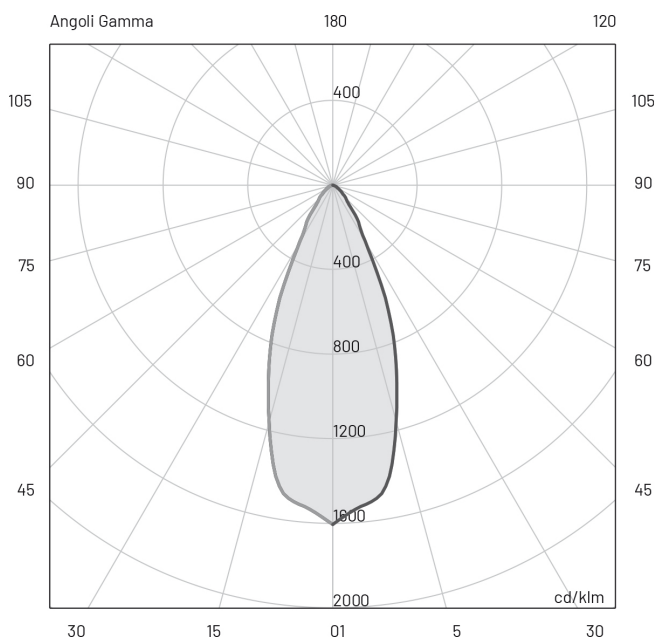

Included accessories

- 1 m length cable -05RN-F
- Fixing kit short (7,5 cm)
- Single connection IP68

Available accessories

- 00KEYFGL.250_ Fixing kit long (25 cm)
- 00KEYFGL.150_ Fixing kit medium (15 cm)