


Brick Light | 5 W | diffuse | Wall recessed

Inox Striped

Technical Specifications


Source lamp	LED 5 W
Total wattage	7
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	383 lm (700 lm*) @ 3000 K
Luminous efficacy	55 lm/W @ 3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	65
IK rating	4
Insulation class	I

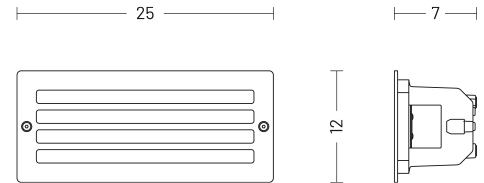


Materials

Body	Die-cast aluminium EN47100
Diffuser	Frosted tempered glass 5 mm
Finishing	Inox AISI 316L - Inox AISI 316L

Isolux

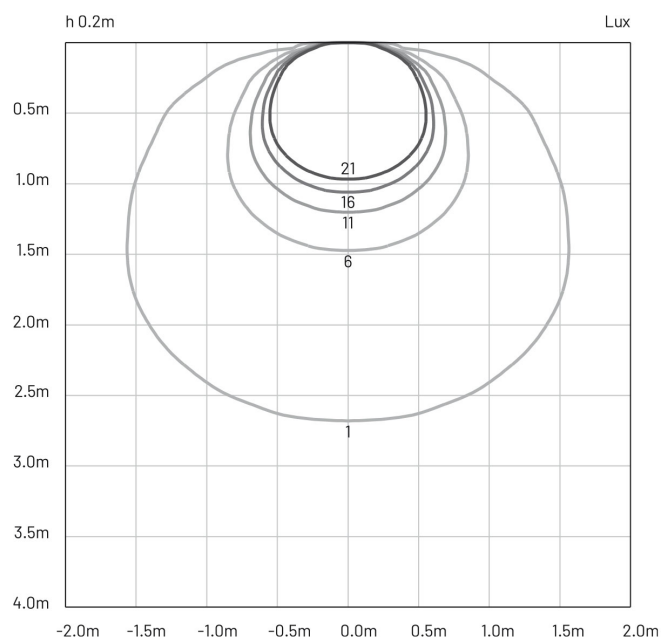

Photometry

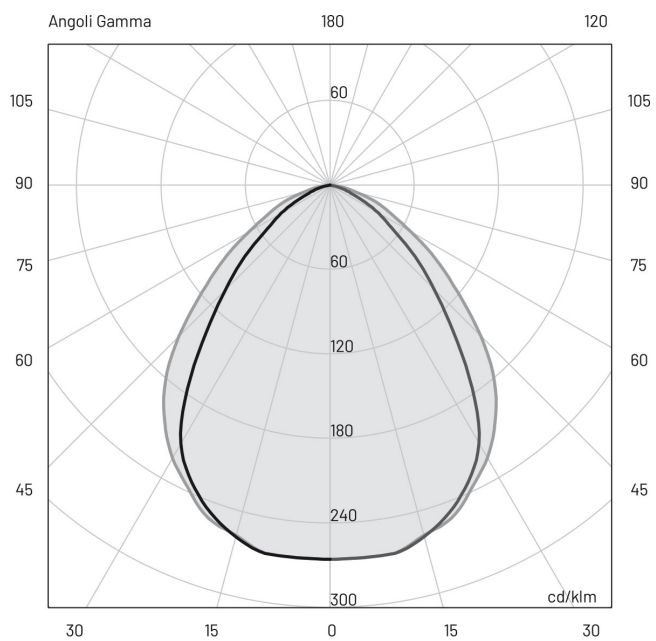

Included accessories

- Housing box