
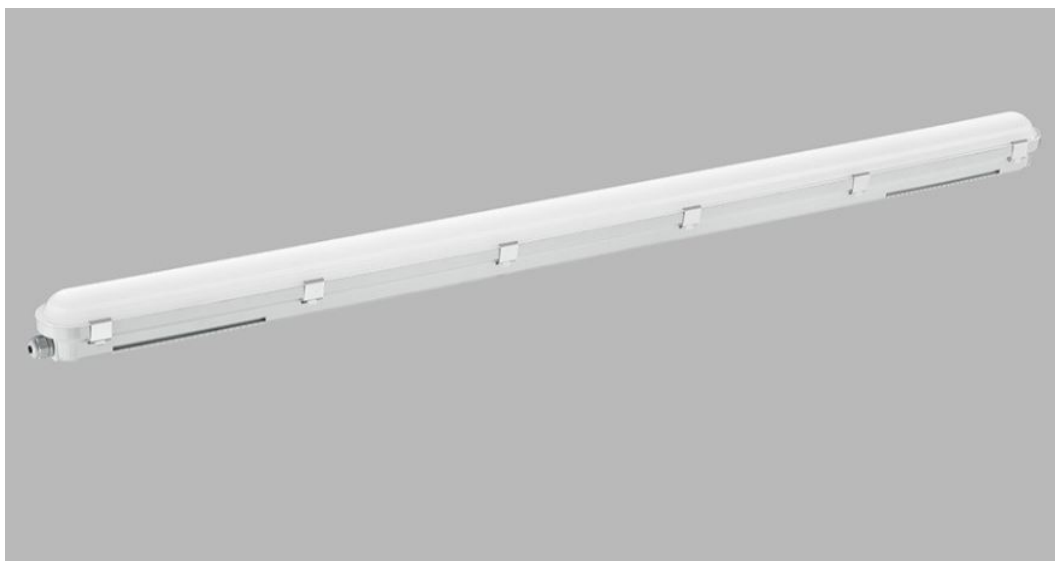


OLBIA II

Surface / Suspended
IP66



LED		ECG	IP66		ECG DALI	EMERGENCY	5 years warranty	50,000 hrs L80/B20 Ta=25°C	220-240V 50-60Hz		CE
-----	--	-----	------	--	----------	-----------	------------------	----------------------------------	---------------------	--	----

OLBIA II

OLBIA II
Surface / Suspended

NET LIGHT OUTPUT

up to 7500 lm

EFFICIENCY

up to 145 lm/W

WIRING

ECG, on request: DALI, 1-10V
On request: Emergency kit (1h, 3h)

CCT

4000K

CRI

≥ 80 Ra

MATERIALS

> Housing	Grey polycarbonate (PC), UV stable
> Diffuser	Opal polycarbonate (PC)
> Reflector	Steel sheet, white color (RAL 9003)
> Clips	Stainless steel

LIGHT DISTRIBUTION





Direct 160°

SURFACE FINISH

Grey polycarbonate (PC)

ACCESSORIES

Stainless steel clips, PG13,5, Fixation screws

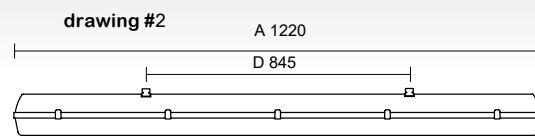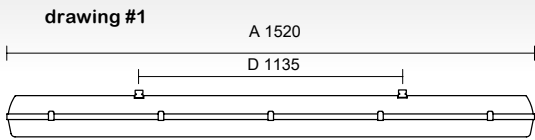

Net lumen output	CCT	Power	Dimensions	Weight	Purchase code
(lm)	(K)	(W)	(mm)	(kg)	
3150	4000	20	A: 1220 D:845	1.80	OLBIA II.120.20.3150.4K.66
3750	4000	25	A: 1220 D:845	1.80	OLBIA II.120.25.3750.4K.66
4500	4000	30	A: 1220 D:845	1.80	OLBIA II.120.30.4500.4K.66
5150	4000	35	A: 1220 D:845	1.80	OLBIA II.120.35.5150.4K.66
4550	4000	29	A: 1520 D:845	2.20	OLBIA II.150.29.4550.4K.66
5400	4000	36	A: 1520 D:845	2.20	OLBIA II.150.36.5400.4K.66
6450	4000	43	A: 1520 D:845	2.20	OLBIA II.150.43.6450.4K.66
7500	4000	52	A: 1520 D:845	2.20	OLBIA II.150.52.7500.4K.66