


## 24V Star installation (6 Way distributor box)



Concrete ceiling

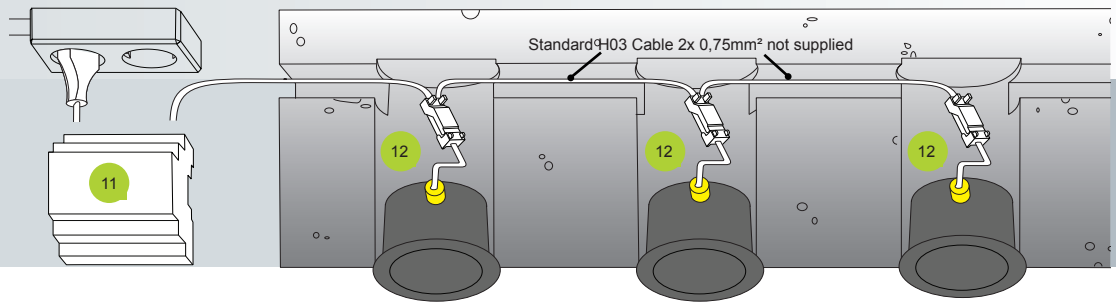

### Features

- Long lifetime
- Efficiency and Powerfactor according newest norms
- Self resetting protections
- Universal input voltage 110-240V
- Comply with all relevant norms
- Switching powersupply




	11  Max 4spots	11  Max 7 spots
Article number	704005000002	704105000002
Description	Meanwell DR60 24V	Meanwell DR100 24V
EAN-code	8718347090227	8718347090234
Measurements	100x60x85mm	100x105x65mm
Input voltage	88-264V~ 50/60Hz	88-264V~ 50/60Hz
Output voltage	24Vdc	24Vdc
Efficiency	88%	91%
Safety norms	EN60950	EN60950
EMC norms	EN55015	EN55015
Operating temperature	-20° C / +40° C	-20° C / +40° C
Protection against water	IP20	IP20
Quantity single package	1 pc	1 pc
Weight single package	292 gr	348 gr
Dimensions single package	80x100x63mm	100x100x65mm
Quantity per carton	32 pcs	32 pcs
Dimensions carton	400x400x300mm (0.0048m3)	400x400x300mm (0.0048m3)
Quantity per pallet	1536 pcs	1536 pcs
Expected lifetime at 25°C	216.000 Hrs	330.738 Hrs
Warranty	3 years	3 years

### NECTOR S connector system

- Save money and time with easy installation
- No polarity problems anymore
- New market standard
- 10mm plug system
- Both star and line installation possible
- Connectable to Wieland GST18 system



	12 
Article number	555205BL0000
Description	LV Plug to Connection box
EAN-code	871834709180
Protection against water	IP20
Input voltage	24Vdc
Warranty	3 Years
Safety norms	EN60320
Quantity single package	1 pc
Weight single package	28 gr
Package type	Plastic bag
Quantity per carton	160 pcs
Dimensions carton	400x400x300 mm
Quantity per pallet	7680 pcs