



CoreLine Trunking Gen2

LL200Z MB-SW 2xEP CU7 WH

Coreline Trunking Gen2 - - - Finger-protected - 0.2 J standard - White


CoreLine Trunking Gen2 is a light-line system that is designed for simplicity. It comes in a choice of lengths, flux packages and beam shapes to suit every project and application. Easy to use and integrate with spots and sensors, CoreLine Trunking Gen2 provides consistent, high-quality lighting with added protection against accidental water ingress. The innovative system is also easy to assemble and install for faster retrofits and refurbishments.

Product data


General information	
Protection class IEC	Safety class I
Material	Steel
Angle	-
Accessory color	White
Product family code	LL200Z [Coreline Trunking Gen2]
Operating and electrical	
Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Mechanical and housing	
Overall length	267 mm
Overall width	80 mm
Overall height	50 mm

Dimensions (Height x Width x Depth)	50 x 80 x 267 mm
Approval and application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Product data	
Full product code	871951410819600
Order product name	LL200Z MB-SW 2xEP CU7 WH
EAN/UPC - Product	8719514108196
Order code	910925867562
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925867562
Net Weight (Piece)	0.435 kg

CoreLine Trunking Gen2



Dimensional drawing

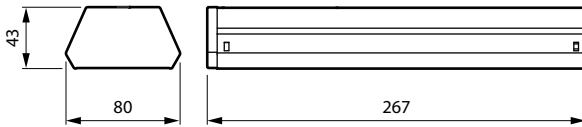

LL200Z MB-SW 2xEP CU7 WH

