


06 Downlights Fixed LED>The 40-48W Round Recessed Panels Die Cast

10148PE/W/W

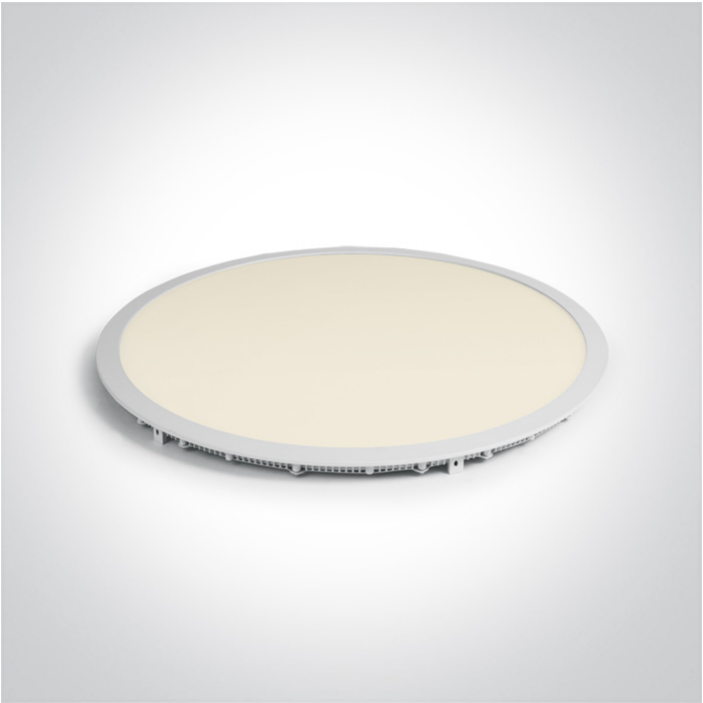

48W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Requires 1200mA LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Must be ordered separately



89048

Related items



89048T



89050L



89050TLD


Physical Specification

Item Group	06 Downlights Fixed LED
------------	-------------------------

Family	The 40-48W Round Recessed Panels Die Cast
Order Code	10148PE/W/W
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular
Height	20mm
Diameter	600mm
Cutout Hole Diameter	585mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

Electrical Characteristics


Fitting

Input Type	Constant Current
Input Current	1200mA
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	240

Illumination Data

Colour Temperature	3000K
Lumen Output	3500lm

Light Efficiency
CRI
Beam Angle
Illumination Diagram

72,91lm/W
80
120°


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

72cm
65cm
4,5cm
3,3Kg
4
5291889041863
9405109890

Certification & Warranty

Warranty
Average Lifetime
Weee Directive

2 Years
30000 hours
Yes

switch to  
one light!

