


Mira 150 | 10 W | spot 18° | Floor recessed

Round frame

Technical Specifications

Source lamp	LED 10 W
Total wattage	12.5
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	1144 lm (1300 lm*) @ 3000 K
Luminous efficacy	91.5 lm/W @ 3000 K
McADAM steps	3
Beam	spot 18°
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I

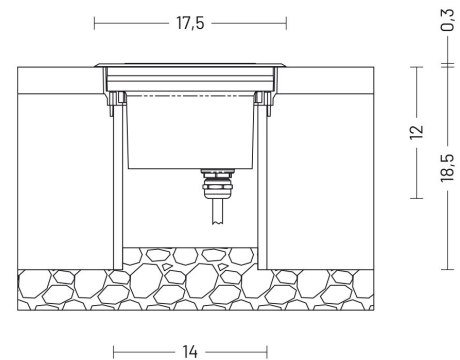


Materials

Body	Die-cast aluminium EN47100
Diffuser	Extra clear tempered glass 12 mm
Finishing	Inox AISI 316L - Inox AISI 316L

E (lux)

H (m)	lux (3000 K)	lux (4000 K)	Ø (m)
1.00	8850	8850	0.3
2.00	2212	2212	0.6
3.00	983	983	0.9
4.00	553	553	1.2
5.00	345	345	1.6

Photometry

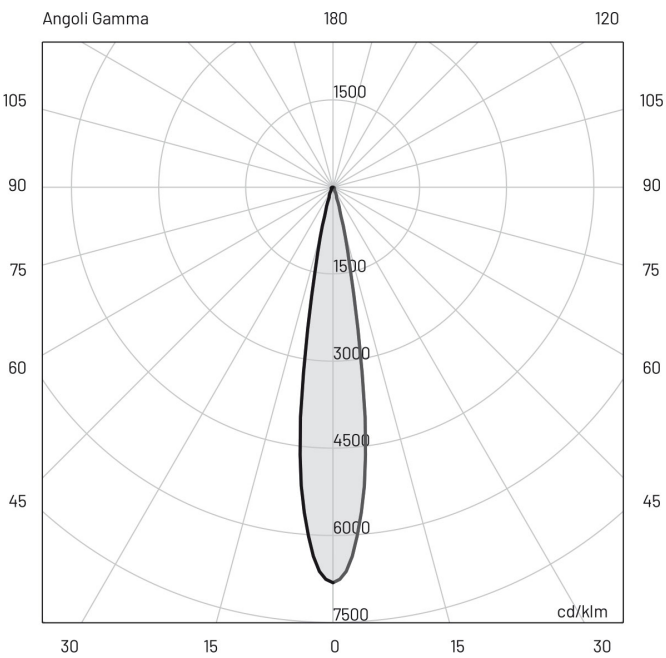

Available accessories

0201007V0200

Sandblasted glass