

Extension terminal, 3p, 25mm²

Part no. BK25/3-PKZ0 Article no. 032720 Catalog No. XTPAXIT



Delivery program

Product range	Accessories
Accessories	Incoming terminal
For use with	PKZM0 PKE

Notes

For three-phase commoning link, protected against accidental contact, $\rm U_{e}$ = 690 V, $\rm I_{u}$ = 63 A

For conductor cross-sections:

2.5 - 25 mm² stranded

2.5 - 16 mm² flexible with ferrules

AWG 14 - 6, for use on terminals 1, 3, 5

Design verification as per IEC/EN 61439 Technical data for design verification Rated operational current for specified heat dissipation I_n Α 63 W 1.8 Heat dissipation per pole, current-dependent P_{vid} w Equipment heat dissipation, current-dependent P_{vid} 5.4 Static heat dissipation, non-current-dependent P_{vs} w 0 Heat dissipation capacity $\mathsf{P}_{\mathsf{diss}}$ w ٥ Operating ambient temperature min. °C -25 °C Operating ambient temperature max. 55 IEC/EN 61439 design verification 10.2 Strength of materials and parts 10.2.2 Corrosion resistance Meets the product standard's requirements. 10.2.3.1 Verification of thermal stability of enclosures Meets the product standard's requirements. 10.2.3.2 Verification of resistance of insulating materials to normal heat Meets the product standard's requirements. 10.2.3.3 Verification of resistance of insulating materials to abnormal heat Meets the product standard's requirements. and fire due to internal electric effects 10.2.4 Resistance to ultra-violet (UV) radiation Meets the product standard's requirements. 10.2.5 Lifting Does not apply, since the entire switchgear needs to be evaluated. 10.2.6 Mechanical impact Does not apply, since the entire switchgear needs to be evaluated. 10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility.

10.9 Insulation properties

10.9.2 Power-frequency electric strength

10.9.3 Impulse withstand voltage

10.9.4 Testing of enclosures made of insulating material

10.10 Temperature rise

10.11 Short-circuit rating

10.12 Electromagnetic compatibility

10.13 Mechanical function

11/05/2016

Is the panel builder's responsibility.

Is the panel builder's responsibility.

Is the panel builder's responsibility.

observed.

observed.

leaflet (IL) is observed.

provide heat dissipation data for the devices.

The panel builder is responsible for the temperature rise calculation. Eaton will

Is the panel builder's responsibility. The specifications for the switchgear must be

Is the panel builder's responsibility. The specifications for the switchgear must be

The device meets the requirements, provided the information in the instruction

Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Accessories for low-voltage switch technology (EC002498)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Low-voltage switch technology (accessories) / Component for low-voltage switch technology

Type of accessory

Connection clamp

Approvals	
Product Standards	UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	165628
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Specially designed for North America	No



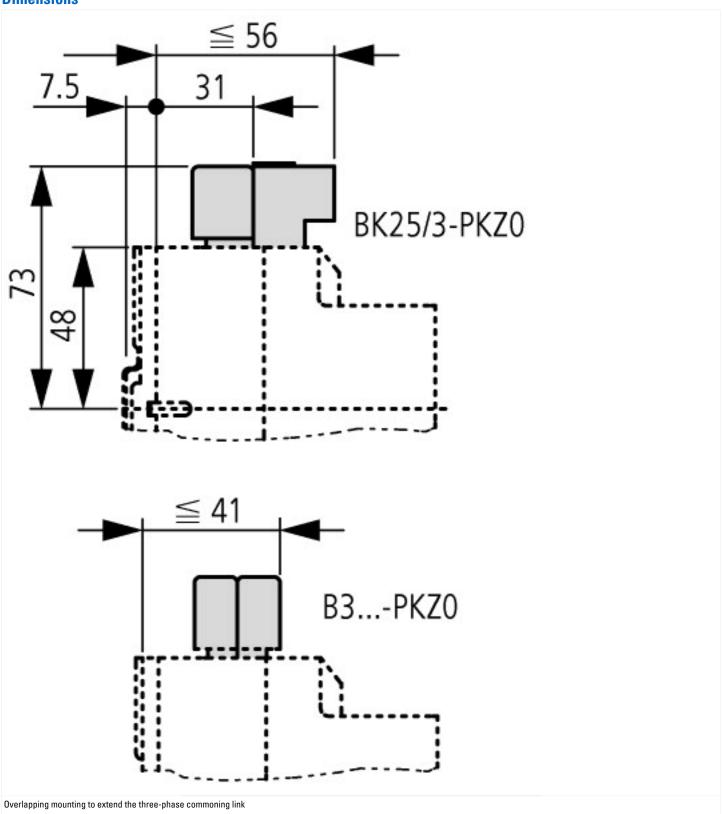

Additional product information (links)

Motor starters and "Special Purpose Ratings" for the North American market Busbar Component Adapters for modern Industrial control panels http://www.moeller.net/binary/ver_techpapers/ver953en.pdf http://www.moeller.net/binary/ver_techpapers/ver960en.pdf