

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.

LANDA[®]
illuminotecnica

Mira 65

Article 5321LL5N.INX Natural White	5321LL5H.INX Warm White
Product type walkover	
Body material Anodized aluminium AW 6060	
Tempered transparent glass diffuser in 5mm thick and silicon gasket.	
Dimmable: NO	
Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre.	
Ring in Aluminium AW 6060 anodized in INOX color	
24V DC <u>Transformer not included</u>	


IK08
IP67

Powered by
CREE XPG5

5W 24V DC
Lens Included: beam 40°
5321LL5N.INX 570lm
4000°K Ra80 800lx at 1mt

5321LL5H.INX 570lm
3000°K Ra80 800lx at 1mt

Supplied with 1 mt. cable -05RN-F
Dimmable: NO

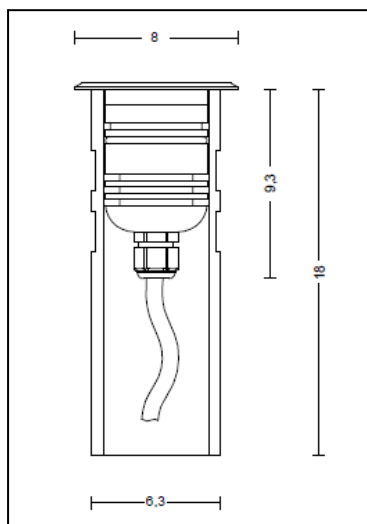

IP67 transformer available on request:
0409BT014 12W from 1 to 2 pcs.
0409BT015 25W from 1 to 4 pcs.

IP67 transformer on request:
0409BT016 100W from 1 to 16 pcs.

Accessories available on request:



code **0404M009**
Single connection IP68

