


## Panel mounted inlet - Part no. 1984



- screw terminals
- highly heat resistant contact carrier
- nickel plated contacts
- a retaining nose to hold the hinged lid of the connector must be provided by the customer in order to ensure satisfactory locking

Protection type	IP 44
Ampere	63A
Poles	4p
Voltage	230V
Hertz	50-60 Hz
Earth position	9h
Contact	nickel plated contacts, highly heat resistant contact carrier
Connection technology	Screw terminals
Shutter	

Std. Pack. 5 Qty.

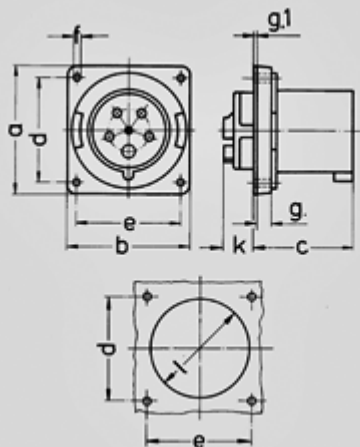

Drawing	Amp.	63		
2 MB 155	Poles	3	4	5
Dim. in mm	a	110	110	110
	b	106	106	106
	c	86	86	86
	d	90	90	90
	e	90	90	90
	f	5,5	5,5	5,5
	g.	12	12	12
	g.1	2	2	2
	k	28	28	28
	l	86	86	86
Terminal for cond. cross section (mm <sup>2</sup> ) min.-max.		6 —16	6 —16	6 —16