

RK 750 V Plastisolert koblingsledning.

RK 750V 2,5 G/G

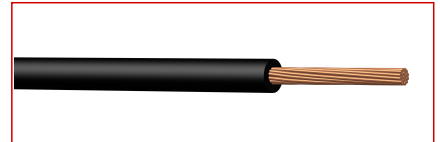
H07V-K

Nexans ref.: 10022598**El. nummer: 1050546****GTIN (EAN 13): 7045210016611**


Plastisolert koblingsledning

Beskrivelse

Koblingsledning med mangetrådet kobberleder. Anbefalt brukt der det er hesiktsmessig å benytte fleksible ledninger, f.eks ved tavlebygging.



Standarder

Internasjonal EN 50265; HD 21.3;
IEC 60332-1**Norsk** NEK-HD 21.3Blyfri
JaNormert spenning i 3 fase systemer U₀/
U
450 / 750 VMax.conductor temp.in service
70 °CRoHS conform
Ja


RK 750 V Plastisolert koblingsledning.

RK 750V 2,5 G/G
Nexans ref.: 10022598

Egenskaper

Konstruksjonsegenskaper	
Kapfefarge	Gul/grønn
Lederform	Mangetrådet
Ledermateriale	Glødd kobber
Isolasjon	Polyvinylklorid - PVC
Blyfri	Ja
Dimensjonsegenskaper	
Lederdiameter	2,0 mm
Nominell ytre diameter	3,7 mm
Antall ledere	1
Ledertverrsnitt	2,5 mm ²
Vekt (ca.)	3,0 kg/100m
Elektriske egenskaper	
Normert spenning i 3 fase systemer U ₀ /U	450 / 750 V
Bruksegenskaper	
Lengde	100 m
Forpakning	Snelle
Maks. tillatt ledertemperatur	70 °C
RoHS conform	Ja


Blyfri
Ja

Normert spenning i 3 fase systemer U₀/
U
450 / 750 V

Max.conductor temp.in service
70 °C

RoHS conform
Ja