

Double Box with TwinCONTACT - Part no. 1647




- screwless spring terminals
- CEE and receptacle SCHUKO® in one enclosure

Protection type IP 44

Fitted with 1 CEE 16A, 4p, 230V
1 SCHUKO® 16A, 230V

Ampere 16A
Poles 4p
Voltage 230V
Hertz 50-60 Hz
Shutter

Std. Pack. 5 Qty.

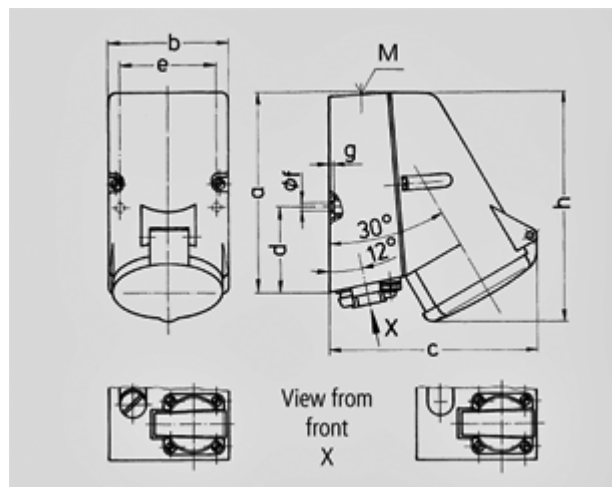

Drawing	Amp.	16		32
1 MB 354	Poles	4	5	5
Dim. in mm	a	141	141	141
	b	85	85	85
	c	139	139	153
	d	61	61	61
	e	68	68	68
	f	5,3	5,3	5,3
	g.	4	4	4
	h	145	145	162
	M	25	25	32
Max. cable diam. (mm)		18	18	25
Terminal for cond. cross section (mm²) min.-max.		1.5 —4	1.5 —4	2.5 —10