

Lavvolthalogen uten reflektor LV

Capsuleline

**Kompakt størrelse; klart, hvitt lys**

Halogenlyskilde med lav spenning. Ideell løsning til små, dekorative armaturer. Det lave fyllingstrykket og glasset med UV-blokk gjør at den kan brukes uten frontglass. Den kompakte Capsuleline-lyskilden gir klart, hvitt lys gjennom en lang levetid.

Produktfordeler

- Klart, strålende halogenlys som skaper rett atmosfære

- Kan dimmes helt, fra 0 til 100%, for å oppfylle ulike krav til lysstyrke
- Lave vedlikeholdskostnader på grunn av lang levetid


Produktegenskaper

- Overlegen lyskvalitet med enestående fargegjengivelse ($R_a = 100$)
- Bruker nettspenning, trenger ikke transformator

- Kompakt størrelse, får enkelt plass i armaturen
- Universell brennstilling
- Tennes umiddelbart

Bruksområder


- Generell belysning i butikker, restauranter, hoteller, gallerier, utstillinger og museer. Ideell til bruk i små, dekorative armaturer

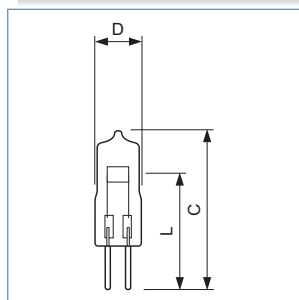


Dim. nr.	C max.	D max.	L nom.
1	33	9	22
2	33	9	24

Type	Effekt	Sokkel	Spenning	Lampe- kolbe utførelse	Tilleggs- informasjon	Paknings- type	Paknings- utførelse	Lysytelse		Dim. nr.	Photo letter	EOC 8711500...
(lm)												
Capsuleline	5W	G4	12V	CL	4000h	ICT	10X10F	60	B	I	B	40969050
Capsuleline	10W	G4	12V	CL	2000h	ICT	10X10F	100	C	3	C	41298050
Capsuleline	10W	G4	12V	CL	4000h	ICT	10X10F	140	C	I	D	40970650
Capsuleline	20W	G4	12V	CL	2000h	ICT	10X10F	255	C	4	C	41299750
Capsuleline	20W	G4	12V	CL	4000h	ICT	10X10F	310	C	I	D	40210350
Capsuleline	20W	G4	24V	CL	4000h	ICT	10X10F	300	C	2	B	40962150
Capsuleline	20W	GY6.35	12V	CL	4000h	ICT	10X10F	300	C	6	E	40219650
Capsuleline	35W	GY6.35	12V	CL	4000h	ICT	10X10F	600	C	6	E	40218950
Capsuleline	50W	GY6.35	12V	CL	2000h	ICT	10X10F	850	C	5	A	41295950
Capsuleline	50W	GY6.35	12V	CL	4000h	ICT	10X10F	880	C	6	E	40217250
Capsuleline	50W	GY6.35	24V	CL	4000h	ICT	10X10F	850	C	6	E	40963850
Capsuleline	75W	GY6.35	12V	CL	4000h	ICT	10X10F	1 400	C	6	E	40216550
Capsuleline	100W	GY6.35	12V	CL	4000h	ICT	10X10F	1 850	C	6	E	40215850
Capsuleline	100W	GY6.35	24V	CL	3000h	ICT	10X10F	2 550	B	6	E	40964550

42031027

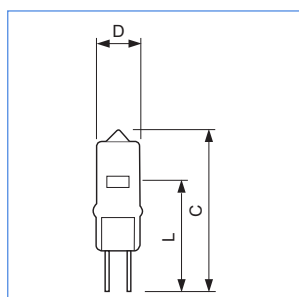

Dim. nr.	C max.	D max.	L nom.
3	33	10	22,2
4	33	10	22,0
5	44	12	30,0



Dim. nr.	C max.	D max.	L nom.
6	44	12	30

Lavvolthalogen uten reflektor LV

Capsuleline

Additional technical data


Produktnavn	Fargegjengivel- ses indeks (CRI) (R.)	Fargetempera- tur (K)	Lampekolbe utførelse	Lampekolbe	Energy consumption kWh/1000h (kWh)	Philips kode	Dimbar	Brennstilling
Capsuleline 10W G4 12V CL 2000h	100	2700	Klar	T3	11	18182	Ja	Universell
Capsuleline 5W G4 12V CL 4000h	100	2800	Klar	T3	5	13283	Ja	Universell
Capsuleline 10W G4 12V CL 4000h	100	2850	Klar	T3	11	13284	Ja	Universell
Capsuleline 20W G4 12V CL 2000h	100	2800	Klar	T3	21	14729	Ja	Universell
Capsuleline 20W G4 12V CL 4000h	100	3000	Klar	T3	21	13078	Ja	Universell
Capsuleline 20W G4 24V CL 4000h	100	3000	Klar	T3	21	13091	Ja	Universell
Capsuleline 20W GY6.35 12V CL 4000h	100	3000	Klar	T4	21	13104	Ja	Universell
Capsuleline 35W GY6.35 12V CL 4000h	100	3000	Klar	T4	37	13103	Ja	Universell
Capsuleline 50W GY6.35 12V CL 2000h	100	2900	Klar	T4	53	14730	Ja	Universell
Capsuleline 50W GY6.35 12V CL 4000h	100	3000	Klar	T4	53	13102	Ja	Universell
Capsuleline 50W GY6.35 24V CL 4000h	100	3000	Klar	T4	53	13090	Ja	Universell
Capsuleline 75W GY6.35 12V CL 4000h	100	3000	Klar	T4	80	13101	Ja	Universell
Capsuleline 100W GY6.35 12V CL 4000h	100	3000	Klar	T4	106	13100	Ja	Universell
Capsuleline 100W GY6.35 24V CL 3000h	100	3000	Klar	T4	106	13089	Ja	Universell

Lagerdata

Produktnavn	El.nr.	Pakningstype	Beskrivelse pakningstype	Antall i kart.	Pakningsutførelse
Capsuleline 10W G4 12V CL 2000h	3766530	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 5W G4 12V CL 4000h	3758389	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 10W G4 12V CL 4000h	3758390	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 20W G4 12V CL 2000h	3766531	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 20W G4 12V CL 4000h	3758330	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 20W G4 24V CL 4000h	3758333	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 20W GY6.35 12V CL 4000h	3758347	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 35W GY6.35 12V CL 4000h	3758346	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 50W GY6.35 12V CL 2000h	3766532	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 50W GY6.35 12V CL 4000h	3758345	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 50W GY6.35 24V CL 4000h	3758334	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 75W GY6.35 12V CL 4000h	3758344	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 100W GY6.35 12V CL 4000h	3758343	ICT	1 Lamp in a Folding Carton	100	10X10F
Capsuleline 100W GY6.35 24V CL 3000h	3758335	ICT	1 Lamp in a Folding Carton	100	10X10F

Produktnavn	Antall per pakning	Pakningslengde (mm)	Pakningsbredde (mm)	Pakningshøyde (mm)	Gross weight per piece (g)	Net weight per piece (g)
Capsuleline 10W G4 12V CL 2000h	1	260	146	142	6.20	1.20
Capsuleline 5W G4 12V CL 4000h	1	271	148	147	5.55	1.20
Capsuleline 10W G4 12V CL 4000h	1	271	148	147	5.55	1.20
Capsuleline 20W G4 12V CL 2000h	1	271	148	147	6.20	1.10
Capsuleline 20W G4 12V CL 4000h	1	271	148	147	5.55	1.81
Capsuleline 20W G4 24V CL 4000h	1	271	148	147	5.20	1.20
Capsuleline 20W GY6.35 12V CL 4000h	1	271	148	147	6.30	2.30
Capsuleline 35W GY6.35 12V CL 4000h	1	271	148	147	6.20	2.30
Capsuleline 50W GY6.35 12V CL 2000h	1	271	148	147	6.75	2.10
Capsuleline 50W GY6.35 12V CL 4000h	1	271	148	147	6.75	3.75
Capsuleline 50W GY6.35 24V CL 4000h	1	271	148	147	6.65	2.30
Capsuleline 75W GY6.35 12V CL 4000h	1	271	148	147	6.65	2.30
Capsuleline 100W GY6.35 12V CL 4000h	1	271	148	147	6.65	2.30
Capsuleline 100W GY6.35 24V CL 3000h	1	271	148	147	7.30	2.30

Sokkel

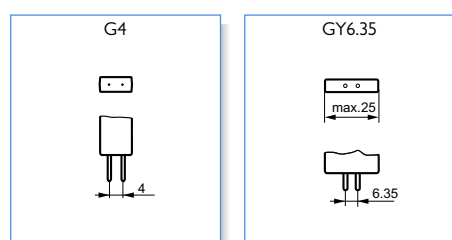

Lavvolthalogen uten reflektor LV

Capsuleline

Additional extended technical data

Produkt navn	Lampe strøm	Lampens lysutbytte	Kolbetemperatur	"Pinch" temperatur	Warm-up Time to 60% Light Outp
	(A)	(lm/W)	(°C [max.])	(°C [max.])	
Capsuleline 10W G4 12V CL 2000h	0.83	10.0	220	350	instant full light
Capsuleline 5W G4 12V CL 4000h	0.42	12.0	600	350	instant full light
Capsuleline 10W G4 12V CL 4000h	0.83	14.0	900	400	instant full light
Capsuleline 20W G4 12V CL 2000h	1.67	12.5	220	350	instant full light
Capsuleline 20W G4 12V CL 4000h	1.67	15.5	900	350	instant full light
Capsuleline 20W G4 24V CL 4000h	0.83	15.0	900	350	instant full light
Capsuleline 20W GY6.35 12V CL 4000h	1.66	15.0	900	350	instant full light
Capsuleline 35W GY6.35 12V CL 4000h	2.95	17.0	900	350	instant full light
Capsuleline 50W GY6.35 12V CL 2000h	4.17	17.0	250	350	instant full light
Capsuleline 50W GY6.35 12V CL 4000h	4.25	17.2	900	350	instant full light
Capsuleline 50W GY6.35 24V CL 4000h	2.08	17.0	900	350	instant full light
Capsuleline 75W GY6.35 12V CL 4000h	6.25	18.8	900	350	instant full light
Capsuleline 100W GY6.35 12V CL 4000h	8.33	22.0	900	350	instant full light
Capsuleline 100W GY6.35 24V CL 3000h	4.17	22.0	900	350	instant full light

Brennstilling

