


## Connector ProTOP - Part no. 193A

Std. Pack. 10 Qty.

- screw terminals
- cable gland and sealing
- strain relief and protection against kinking
- enclosure with thread lock and safety slide

Protection type IP 44  
 Ampere 16A  
 Poles 4p  
 Voltage 230V  
 Hertz 50-60 Hz  
 Earth position 9h  
 Contact standard  
 Connection technology Screw terminals  
 Shutter

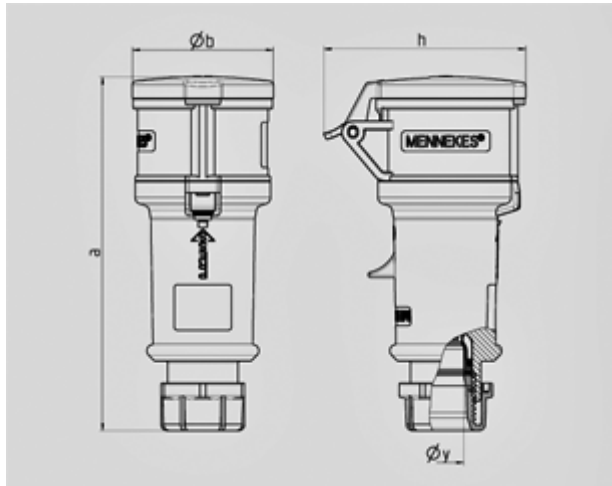

Drawing	Amp.	16			32		
		3	4	5	3	4	5
3 MB 60	Poles						
Dim. in mm	a	160	174	172	214	214	210
	b	57	61	69	75	75	80
	h	83	92	98	100	100	108
	y	16	16	16	22	22	22
Terminal for cond. cross		1	1	1	2,5	2,5	2,5
section (mm <sup>2</sup> ) min.-max.		—2,5	—2,5	—2,5	—6	—6	—6