


Connector ProTOP - Part no. 15A

Std. Pack. 10 Qty.

- screw terminals
- cable gland and sealing
- strain relief and protection against kinking
- enclosure with thread lock and safety slide

Protection type IP 44
 Ampere 16A
 Poles 5p
 Voltage 400V
 Hertz 50-60 Hz
 Earth position 6h
 Contact standard
 Connection technology Screw terminals
 Shutter

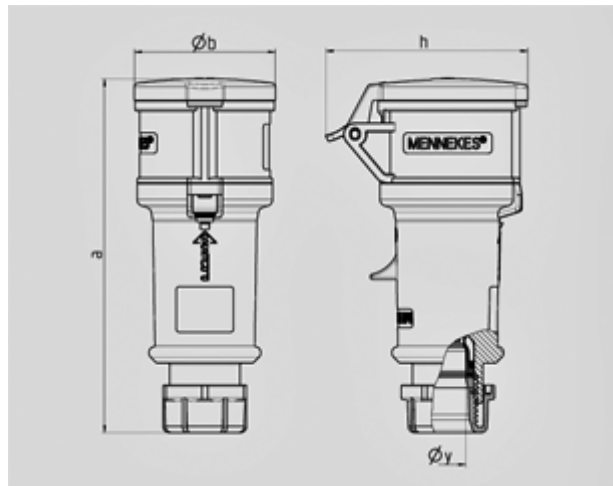

Drawing	Amp.	16			32		
		3	4	5	3	4	5
3 MB 60	Poles						
Dim. in mm	a	160	174	172	214	214	210
	b	57	61	69	75	75	80
	h	83	92	98	100	100	108
	y	16	16	16	22	22	22
Terminal for cond. cross		1	1	1	2,5	2,5	2,5
section (mm ²) min.-max.		—2,5	—2,5	—2,5	—6	—6	—6