



Eye_r 200 | 20 W | wide flood 60° | Ceiling recessed

Also available for ceiling

Technical Specifications


Source lamp	LED 20 W
Total wattage	24
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	1650 lm (2250 lm*) @ 3000 K
Luminous efficacy	80 lm/W @ 3000 K
McADAM steps	3
Beam	wide flood 60°
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	I

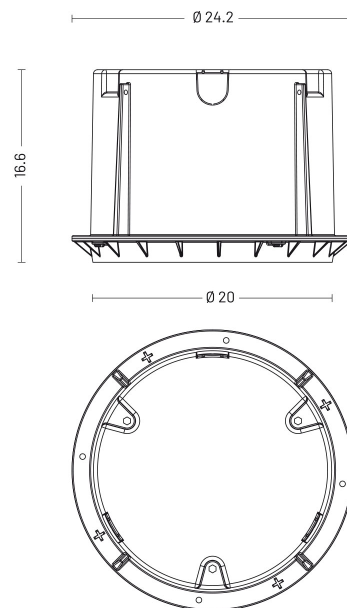


Materials

Body	Die-cast aluminium EN47100
Diffuser	Extra clear glass
Finishing	White - Polyester powder paint

Isolux

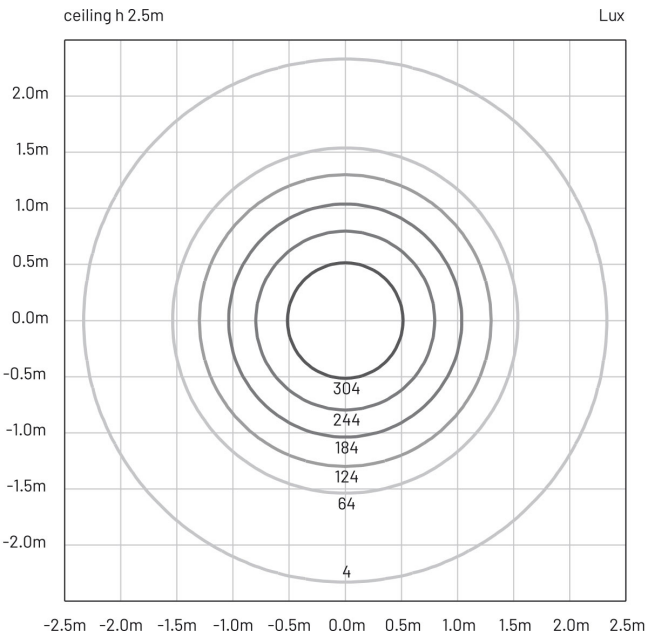

Photometry

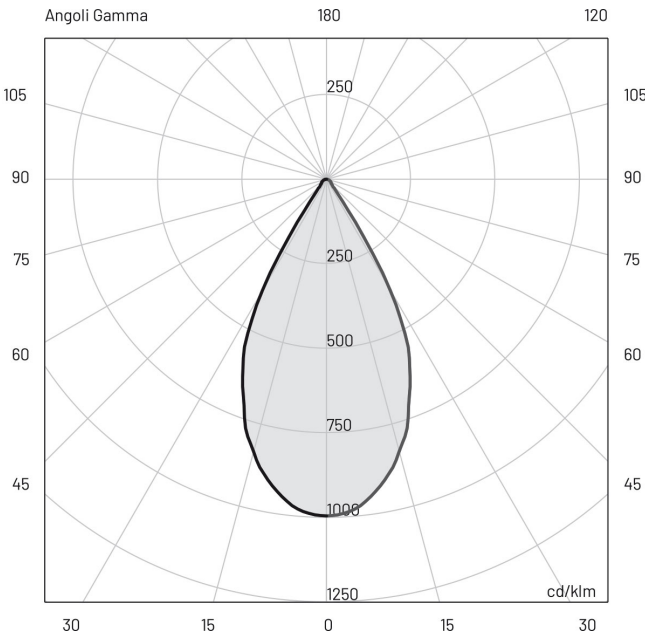

Included accessories

- Housing box

Available accessories

00KEY80	Levelling kit
010829800000	Plastering rim white finish
0303004	Suction cup to screw the glass