

# RC PRIME

Surface / Suspended  
IP66



LED

ECG

IP66

IK10

ECG  
DALI

EMERGENCY

on request

5 years  
warranty

50,000 hrs  
L80/B20  
Ta=25°C

220-240V  
50-60Hz




## RC PRIME

RC PRIME  
Surface / Suspended

|                    |                                                                                                    |
|--------------------|----------------------------------------------------------------------------------------------------|
| LIGHT OUTPUT       | up to 7350 lm                                                                                      |
| EFFICIENCY         | up to 136 lm/W                                                                                     |
| WIRING             | ECG, on request: DALI, 1-10V<br>On request: Emergency kit (1h, 3h)                                 |
| CCT                | 4000K<br>On request: 3000 K, 5000 K, 6500 K                                                        |
| CRI                | ≥ 80 Ra                                                                                            |
| MATERIALS          |                                                                                                    |
| > Housing          | Grey polycarbonate (PC), UV stable                                                                 |
| > Diffuser         | Translucent polycarbonate (PC)                                                                     |
| > Reflector        | Steel sheet, white color (RAL 9003)                                                                |
| > Clips            | Polyamide + 15 % glass fibre or Stainless steel + polyamide                                        |
| LIGHT DISTRIBUTION | Direct                                                                                             |
| ADVANTAGES         | Impact-resistant (IK10), <b>Housing sealed</b> with polyurethane gasket to improve IP66 protection |
| SURFACE FINISH     | Grey polycarbonate (PC)                                                                            |
| ACCESSORIES        | Stainless steel clips, Connector on clients request,<br>Protection grid, Side hanger with blocking |





Connector on clients request  
Wieland connector

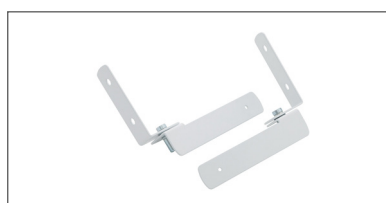


Side hanger with blocking  
It serves to attach the light fitting  
to the wall with the possibility of its  
positioning.



Connector on clients request  
Stucchi connector

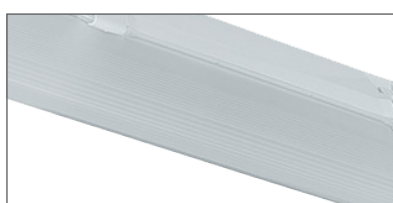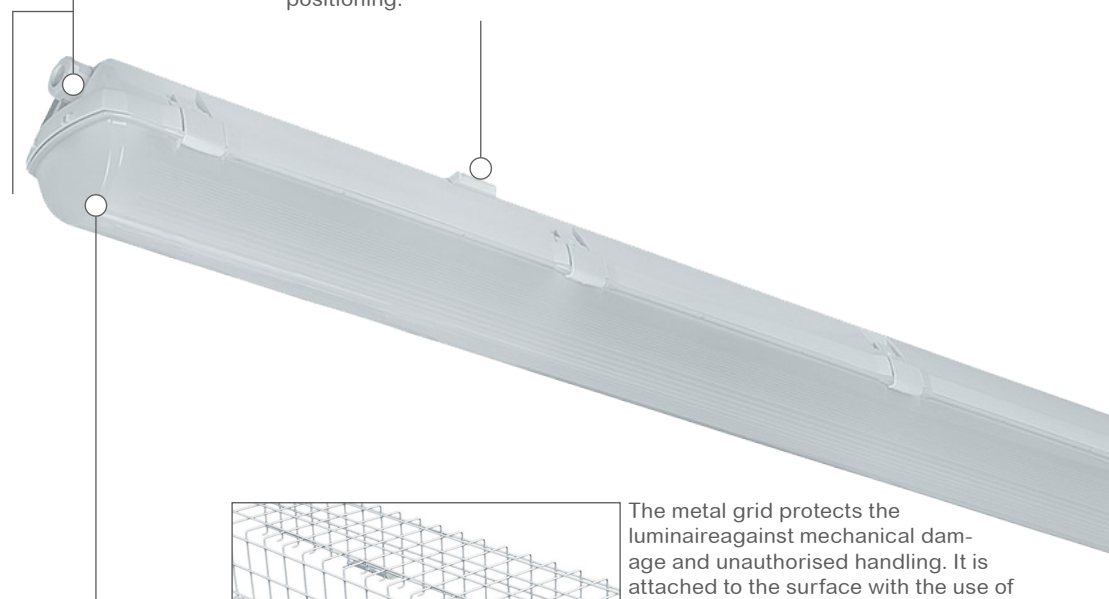


Translucent polycarbonate (PC),  
UV stable, impact-resistant (IK10)  
Fire & ignition resistance (850 C°)

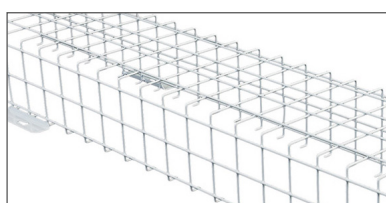

The metal grid protects the  
luminaire against mechanical dam-  
age and unauthorised handling. It is  
attached to the surface with the use of  
screws. The surface is treated with the  
RAL 9003 powder-coated color.

# RC PRIME

Surface / Suspended  
IP66



5 years  
warranty


50,000 hrs  
L80/B20  
Ta=25°C

220-240V  
50-60Hz



## RC PRIME All models

drawing #1



| Net<br>lumen<br>output | CCT  | Power | Wiring | Dimen-<br>sions | Weight | ACS | Purchase code           |
|------------------------|------|-------|--------|-----------------|--------|-----|-------------------------|
| (lm)                   | (K)  | (W)   |        | (mm)            | (kg)   | #   |                         |
| 1290                   | 4000 | 10    | STD    | A: 662 D:350    | 1.30   | N/A | RC.60-10-1290/9.4/IP66  |
| 1550                   | 4000 | 12    | STD    | A: 662 D:350    | 1.20   | N/A | RC.60-12-1550/9.4/IP66  |
| 1970                   | 4000 | 15    | STD    | A: 662 D:350    | 1.30   | N/A | RC.60-15-1970/9.4/IP66  |
| 2390                   | 4000 | 18    | STD    | A: 1272 D:700   | 1.90   | N/A | RC.120-18-2390/9.4/IP66 |
| 2940                   | 4000 | 22    | STD    | A: 1272 D:700   | 1.70   | N/A | RC.120-22-2940/9.4/IP66 |
| 4000                   | 4000 | 30    | STD    | A: 1272 D:700   | 1.90   | N/A | RC.120-30-4000/9.4/IP66 |
| 5880                   | 4000 | 46    | STD    | A: 1272 D:700   | 1.90   | N/A | RC.120-46-5880/9.4/IP66 |
| 2930                   | 4000 | 22    | STD    | A: 1572 D:940   | 2.30   | N/A | RC.150-22-2930/9.4/IP66 |
| 3650                   | 4000 | 27    | STD    | A: 1572 D:940   | 2.20   | N/A | RC.150-27-3650/9.4/IP66 |
| 5040                   | 4000 | 37    | STD    | A: 1572 D:940   | 2.30   | N/A | RC.150-37-5040/9.4/IP66 |
| 7350                   | 4000 | 58    | STD    | A: 1572 D:940   | 2.30   | N/A | RC.150-58-7350/9.4/IP66 |


| # | Accessories (ACS) | Purchase code |
|---|-------------------|---------------|
| # | N/A               | N/A           |

STD - Standard driver  
DALI, 1-10V available on request  
Emergency kit (1h or 3h) available on request





Underground Parking

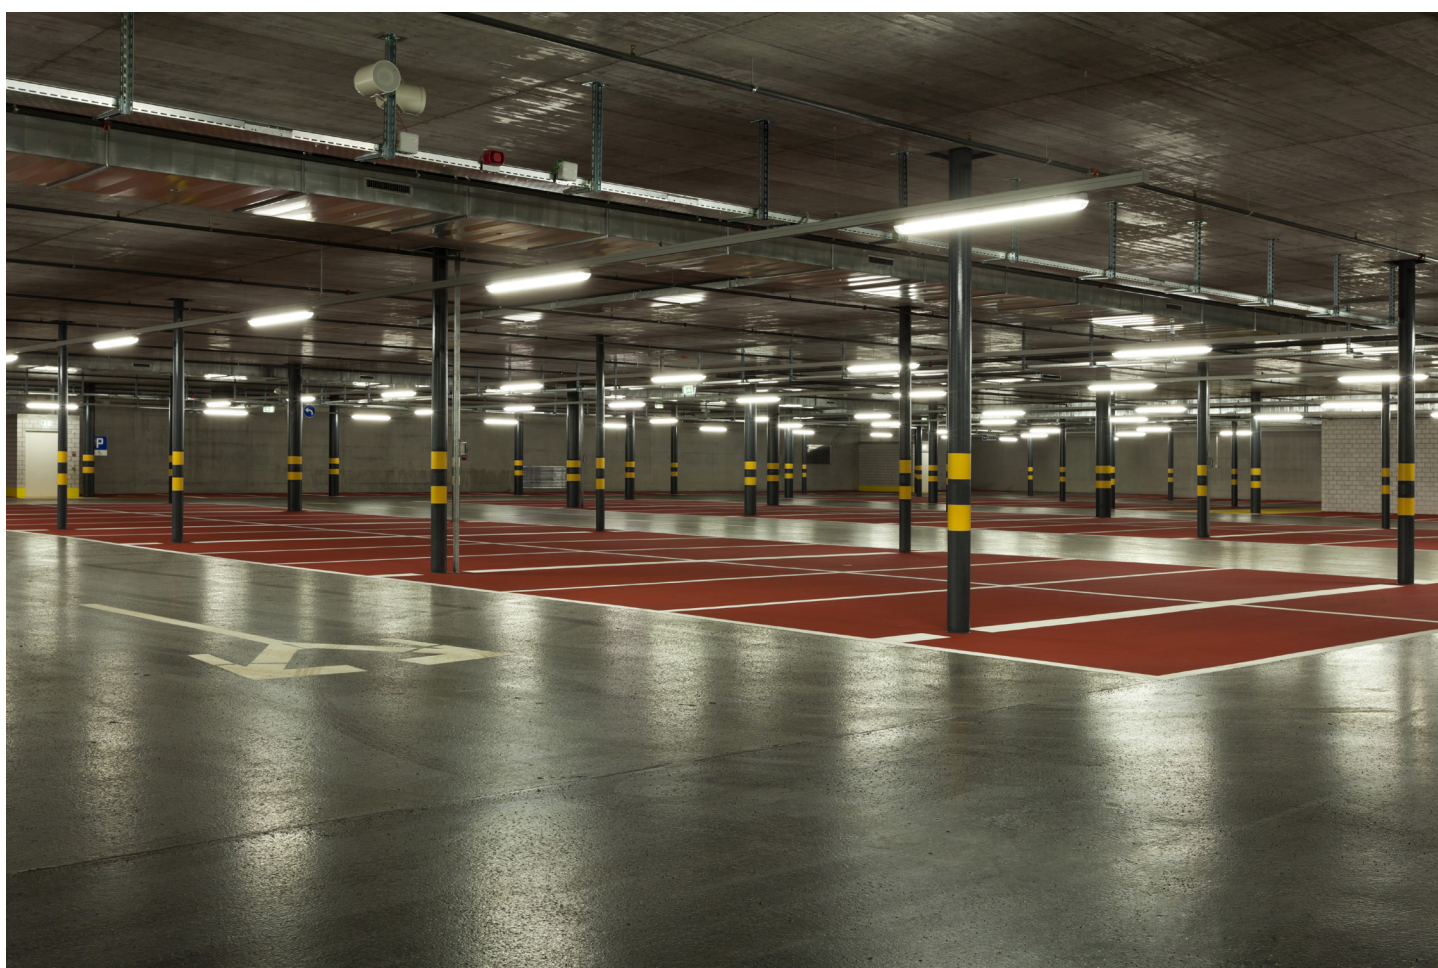

steisa company reserves the right to introduce structural changes and modify the luminaires  
Luminous flux and connected electrical load are subject to an initial tolerance of  $\pm 5\%$ . Tolerance of color temperature:  $\pm 150$  K.  
Unless stated otherwise, the values apply to an ambient temperature of  $25^{\circ}\text{C}$ .