

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.


LANDA[®]
illuminotecnica

Lyras 80

Article 465LL5X1H
Product type Wall Light
Body material Die-casting aluminium EN47100, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation. Ring in die-casting aluminium EN47100
Tempered glass diffuser in transparent 10mm thick and silicon gasket.
Screws in A2 stainless steel
Transformer included: GE LIGHTEC 12W 24V Dimmable: NO

IK08
IP66
850°C
Powered by
Seoul Semiconductor Z5M

Beam 40°
3000°K 5W 220/240V
480LM 700 lux at 1mt RA80



Colours available:

Graphite





nhg

Metalgrey



all

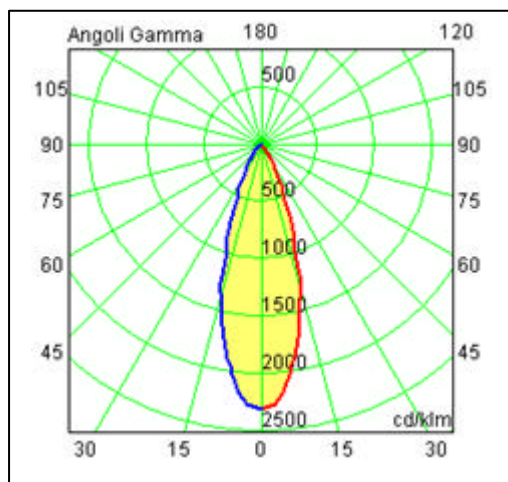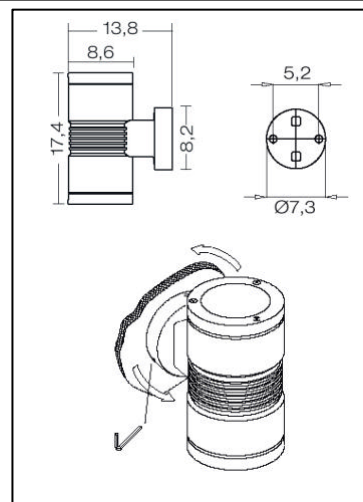

Accessories on request:



code 00K465.02
Reflector for art. 465



code 00K465.01
Visor for art. 465

Light effect:

