

PL-C

MASTER PL-C 4 Pin

**10–15% mer effektivt!**

MASTER PL-C er et medium effekts kompakt lysrør som er spesielt egnet til bruk i generelle downlights i butikker, hoteller, restauranter, catering og kontorer. Den originale Philips-utviklede broteknologien gir optimal ytelse ved bruk, og gir mer lys og høyere effekt enn bøyde løsninger. 4-pinsversjonen er utformet for å fungere med elektroniske HF-forkoblinger med integrert forhåndsvarming, og leveres med en sokkel som enkelt kan settes inn og tas ut.

Produktfordeler

- Best mulig lysytelse for korte eller lange perioder per tenning

- Stort utvalg lysfarger
- God fargegjengivelse (CRI > 80)
- Kan dimmes ned til 10%

Produktegenskaper

- 4-pins feste
- Trifosfat-lysrørteknologi
- Lite lysforringelse gjennom levetiden

Miljøvennlig


- Godt miljøvalg på grunn av høy energieffektivitet, lang levetid og liten lystilbakegang, lavest kvikksølvinnhold
- Innfrir alle RoHS og WEEE krav: lyskilden har et meget lavt kvikksølvinnhold, er blyfri, bruker ingen radioaktive substanser eller miljøfiendtlige kjemiske flammehemmere

Bruksområder

- Designet for generell- eller tilleggs-belysning for jobb- og hjemme-belysning
- Innfelte eller påmonterte downlights, veggenheter, bordlamper og pendellamper

Advarsler og sikkerhet

- Lysets tekniske og elektriske karakteristika blir påvirket av type drift som omgivelsestemperatur, driftsposisjon og type HF-forkobling som er koblet på.
- Kortere levetid hvis lyskilden slås på og av ofte, eller hvis elektrodene ikke er nok oppvarmet før bruk.



Dim. nr.	A max.	B max.	C max.	D max.	D1 max.
1	75,7	94	108,9	27,1	27,1
2	97,7	116	130,9	27,1	27,1
3	109,7	128	142,9	27,1	27,1
4	130,7	149	163,9	27,1	27,1

Type	Effekt/ Fargekode/Pins	Paknings- type	Paknings- utførelse	Sokkel	Fargejengivelses indeks (CRI) (R _a)	Lumenutbytte ved 25°C (lm)	Energy consumption kWh/1000h (kWh)		Dim. nr.	Photo letter	EOC 871 1500...
MASTER PL-C	10W/827/4P	ICT	5X10CC	G24q-1	83	600	11	A	1	A	62325670
MASTER PL-C	10W/830/4P	ICT	5X10CC	G24q-1	83	600	11	A	1	A	62329470
MASTER PL-C	10W/840/4P	ICT	5X10CC	G24q-1	82	600	11	A	1	A	62330070
MASTER PL-C	13W/827/4P	ICT	5X10CC	G24q-1	83	925	15	A	2	B	62326370
MASTER PL-C	13W/830/4P	ICT	5X10CC	G24q-1	83	900	15	A	2	B	62331770
MASTER PL-C	13W/840/4P	ICT	5X10CC	G24q-1	82	900	15	A	2	B	62332470
MASTER PL-C	18W/827/4P	ICT	5X10CC	G24q-2	83	1 200	20	A	3	C	62327070
MASTER PL-C	18W/830/4P	ICT	5X10CC	G24q-2	83	1 200	20	A	3	C	62333170
MASTER PL-C	18W/840/4P	ICT	5X10CC	G24q-2	82	1 200	20	A	3	C	62334870
MASTER PL-C	26W/827/4P	ICT	5X10CC	G24q-3	83	1 760	29	A	4	D	62328770
MASTER PL-C	26W/830/4P	ICT	5X10CC	G24q-3	83	1 760	29	A	4	D	62335570
MASTER PL-C	26W/840/4P	ICT	5X10CC	G24q-3	82	1 760	29	A	4	D	62336270

4520147/2

Additional technical data

Produkt navn	Fargetemperatur (K)
MASTER PL-C 10W/827/4P	2700
MASTER PL-C 13W/827/4P	2700
MASTER PL-C 18W/827/4P	2700
MASTER PL-C 10W/830/4P	3000
MASTER PL-C 10W/840/4P	4000
MASTER PL-C 26W/827/4P	2700
MASTER PL-C 13W/830/4P	3000
MASTER PL-C 13W/840/4P	4000
MASTER PL-C 18W/830/4P	3000
MASTER PL-C 18W/840/4P	4000
MASTER PL-C 26W/830/4P	3000
MASTER PL-C 26W/840/4P	4000

Produktnavn	Energiklasse	Kvikksølv (Hg) innhold (mg)
MASTER PL-C 10W/827/4P	A	1.4
MASTER PL-C 13W/827/4P	A	1.4
MASTER PL-C 18W/827/4P	A	1.4
MASTER PL-C 10W/830/4P	A	1.4
MASTER PL-C 10W/840/4P	A	1.4
MASTER PL-C 26W/827/4P	A	1.4
MASTER PL-C 13W/830/4P	A	1.4
MASTER PL-C 13W/840/4P	A	1.4
MASTER PL-C 18W/830/4P	A	1.4
MASTER PL-C 18W/840/4P	A	1.4
MASTER PL-C 26W/830/4P	A	1.4
MASTER PL-C 26W/840/4P	A	1.4

2nd additional technical data

Produktnavn	LLMF HF 2000h Rated (%)	LLMF HF 4000h Rated (%)	LLMF HF 6000h Rated (%)	LLMF HF 8000h Rated (%)	LLMF HF 12000h Rated (%)
MASTER PL-C 10W/827/4P	92	88	86	84	81
MASTER PL-C 13W/827/4P	92	88	86	84	81
MASTER PL-C 18W/827/4P	99	88	85	83	-
MASTER PL-C 10W/830/4P	92	88	86	84	81
MASTER PL-C 10W/840/4P	92	88	86	84	81
MASTER PL-C 26W/827/4P	92	88	86	84	81
MASTER PL-C 13W/830/4P	99	88	85	83	-
MASTER PL-C 13W/840/4P	99	88	85	83	-
MASTER PL-C 18W/830/4P	92	88	86	84	81
MASTER PL-C 18W/840/4P	92	88	86	84	81
MASTER PL-C 26W/830/4P	92	88	86	84	81
MASTER PL-C 26W/840/4P	92	88	86	84	81

3rd additional technical data

Produktnavn	LSF HF Preheat 2000h Rated,3h (%)	LSF HF Preheat 4000h Rated,3h (%)	LSF HF Preheat 6000h Rated,3h (%)	LSF HF Preheat 8000h Rated,3h (%)	LSF HF Preheat 12000h Rated,3h (%)	LSF HF Preheat 16000h Rated,3h (%)	LSF HF Preheat 20000h Rated,3h (%)	Lamp Wattage EL 25°C, Nominal (W)	Flux nominel ved 25°C (lm)	Flux nominel ved 25°C (lm)
MASTER PL-C 10W/827/4P	99	98	97	90	60	-	-	10	600	600
MASTER PL-C 13W/827/4P	99	98	97	90	60	-	-	13	925	925
MASTER PL-C 18W/827/4P	99	98	95	90	80	65	50	18	1200	1200
MASTER PL-C 10W/830/4P	99	98	97	90	60	-	-	10	600	600
MASTER PL-C 10W/840/4P	99	98	97	90	60	-	-	10	600	600
MASTER PL-C 26W/827/4P	99	98	97	90	60	-	-	26	1760	1760
MASTER PL-C 13W/830/4P	99	98	95	90	80	65	50	13	900	900
MASTER PL-C 13W/840/4P	99	98	95	90	80	65	50	13	900	900
MASTER PL-C 18W/830/4P	99	98	97	90	60	-	-	18	1200	1200
MASTER PL-C 18W/840/4P	99	98	97	90	60	-	-	18	1200	1200
MASTER PL-C 26W/830/4P	99	98	97	90	60	-	-	26	1760	1760
MASTER PL-C 26W/840/4P	99	98	97	90	60	-	-	26	1760	1760

Lagerdata

Produktnavn	El.nr.	Pakningstype	Beskrivelse pakningstype	Antall i kart.	Pakningsutførelse
MASTER PL-C 10W/827/4P	3820670	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 13W/827/4P	3820672	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 18W/827/4P	3820674	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 10W/830/4P	3820671	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 10W/840/4P	3820683	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 26W/827/4P	3820676	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 13W/830/4P	3820673	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 13W/840/4P	3820684	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 18W/830/4P	3820675	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 18W/840/4P	3820685	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 26W/830/4P	3820677	ICT	1 Lamp in a Folding Carton	50	5X10CC
MASTER PL-C 26W/840/4P	3820686	ICT	1 Lamp in a Folding Carton	50	5X10CC


PL-C

MASTER PL-C 4 Pin




Produktnavn	Antall per pakning	Pakningslengde (mm)	Pakningsbredde (mm)	Pakningshøyde (mm)	Gross weight per piece (g)	Net weight per piece (g)
MASTER PL-C 10W/827/4P	I	370	183	120	53.23	41.4
MASTER PL-C 13W/827/4P	I	370	183	142	61.93	49.9
MASTER PL-C 18W/827/4P	I	365	180	152	66.25	55.3
MASTER PL-C 10W/830/4P	I	370	183	120	53.23	41.4
MASTER PL-C 10W/840/4P	I	370	183	120	53.23	41.4
MASTER PL-C 26W/827/4P	I	365	180	175	75.84	60.4
MASTER PL-C 13W/830/4P	I	370	183	142	61.93	49.9
MASTER PL-C 13W/840/4P	I	370	183	142	61.93	49.9
MASTER PL-C 18W/830/4P	I	365	180	152	66.25	55.3
MASTER PL-C 18W/840/4P	I	365	180	152	66.25	55.3
MASTER PL-C 26W/830/4P	I	365	180	175	75.84	60.4
MASTER PL-C 26W/840/4P	I	365	180	175	75.44	60.4

Energifordeling

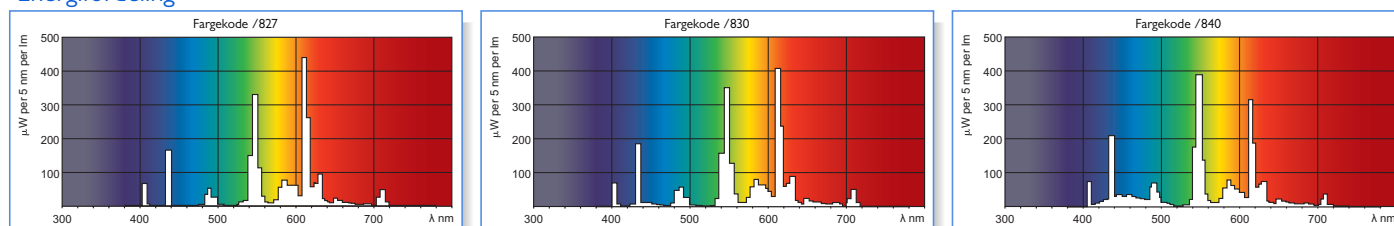

Sokkel

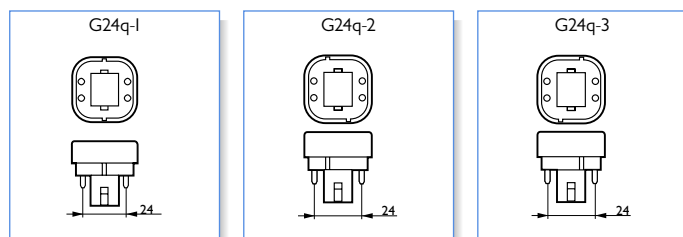

Additional extended technical data

Produktnavn	Farge koordinat X	Farge koordinat Y	Fargebenevnelse	Dimmbar	Sokkelinformasjon
MASTER PL-C 10W/827/4P	463	420	Glødelampe hvit	Ja	4P
MASTER PL-C 13W/827/4P	463	420	Glødelampe hvit	Ja	4P
MASTER PL-C 18W/827/4P	463	420	Glødelampe hvit	Ja	4P
MASTER PL-C 10W/830/4P	440	403	Varmhvit	Ja	4P
MASTER PL-C 10W/840/4P	380	380	Kaldhvit	Ja	4P
MASTER PL-C 26W/827/4P	463	420	Glødelampe hvit	Ja	4P
MASTER PL-C 13W/830/4P	440	403	Varmhvit	Ja	4P
MASTER PL-C 13W/840/4P	380	380	Kaldhvit	Ja	4P
MASTER PL-C 18W/830/4P	440	403	Varmhvit	Ja	4P
MASTER PL-C 18W/840/4P	380	380	Kaldhvit	Ja	4P
MASTER PL-C 26W/830/4P	440	403	Varmhvit	Ja	4P
MASTER PL-C 26W/840/4P	380	380	Kaldhvit	Ja	4P

2nd additional extended technical data

Produktnavn	LSF HF Preheat 2000h Rated,3h (%)	LSF HF Preheat 4000h Rated,3h (%)	LSF HF Preheat 6000h Rated,3h (%)	LSF HF Preheat 8000h Rated,3h (%)	LSF HF Preheat 12000h Rated,3h (%)	LSF HF Preheat 16000h Rated,3h (%)	LSF HF Preheat 20000h Rated,3h (%)
MASTER PL-C 10W/827/4P	99	98	97	90	60	-	-
MASTER PL-C 13W/827/4P	99	98	97	90	60	-	-
MASTER PL-C 18W/827/4P	99	98	95	90	80	65	50
MASTER PL-C 10W/830/4P	99	98	97	90	60	-	-
MASTER PL-C 10W/840/4P	99	98	97	90	60	-	-
MASTER PL-C 26W/827/4P	99	98	97	90	60	-	-
MASTER PL-C 13W/830/4P	99	98	95	90	80	65	50
MASTER PL-C 13W/840/4P	99	98	95	90	80	65	50
MASTER PL-C 18W/830/4P	99	98	97	90	60	-	-
MASTER PL-C 18W/840/4P	99	98	97	90	60	-	-

Mer data se neste side

PL-C

MASTER PL-C 4 Pin **2nd additional extended technical data** (forts.)

Produktnavn	LSF HF Preheat 2000h Rated,3h (%)	LSF HF Preheat 4000h Rated,3h (%)	LSF HF Preheat 6000h Rated,3h (%)	LSF HF Preheat 8000h Rated,3h (%)	LSF HF Preheat 12000h Rated,3h (%)	LSF HF Preheat 16000h Rated,3h (%)	LSF HF Preheat 20000h Rated,3h (%)
MASTER PL-C 26W/830/4P	99	98	97	90	60	-	-
MASTER PL-C 26W/840/4P	99	98	97	90	60	-	-