

Fog_s 200 | 21 W | diffuse | Wall lamps



Also available for ceiling and ceiling/wall recessed

Technical Specifications


Source lamp	LED 21 W
Total wattage	12
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	942 lm (2920 lm*) @ 3000 K
Luminous efficacy	36 lm/W @ 3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	III

Materials


Body	Die-cast aluminium EN47100
Diffuser	Opal glass
Finishing	Grey - Polyester powder paint

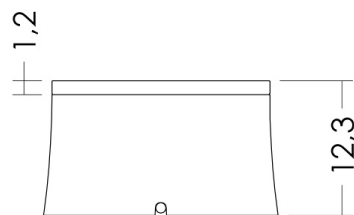

Isolux

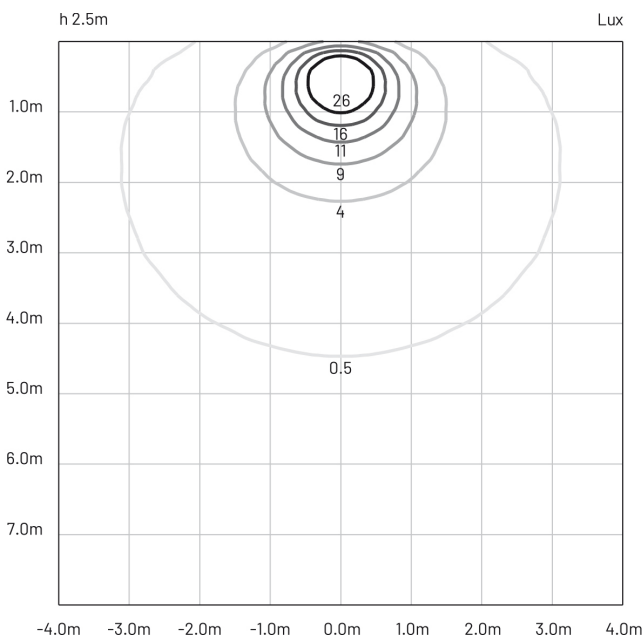

Photometry

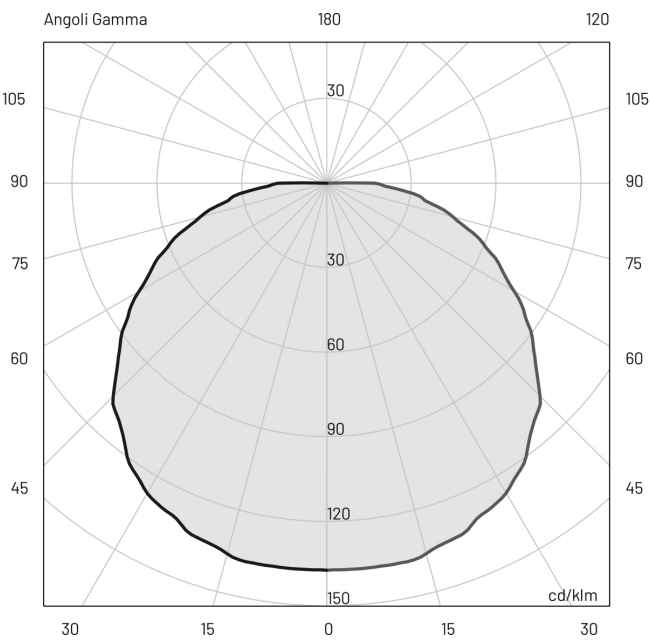

Included accessories

- 0.5 m length cable -05RN-F
- Single connection IP68