

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.

LANDA
illuminotecnica

Mira 65

Article 5376LL5N.INX Natural White	5376LL5H.INX Warm White
Product type walkover	
Body material Anodized aluminium AW 6060	
Opal polycarbonate diffuser in 5mm thick and silicon gasket.	
Dimmable: NO	
Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre.	
Ring in Aluminium AW 6060 anodized in .INX color	
24V DC <u>Transformer not included</u>	

IK08
IP67

Powered by
CREE XPG5


5W 24V DC
5376LL5N.INX 570lm
4000°K Ra80

5376LL5H.INX 570lm
3000°K Ra80

Supplied with 1 mt. cable -05RN-F
Dimmable: NO




CE

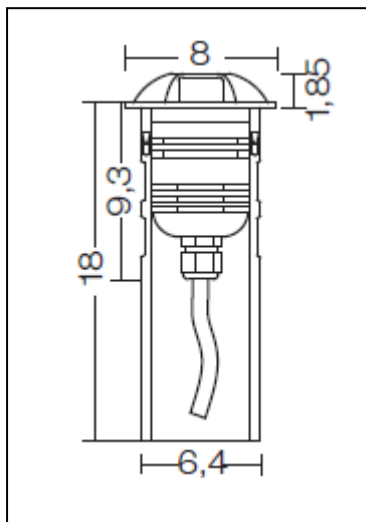

IP67 transformer available on request:
0409BT014 12W from 1 to 2 pcs.
0409BT015 25W from 1 to 4 pcs.

IP67 transformer on request:
0409BT016 100W from 1 to 16 pcs.

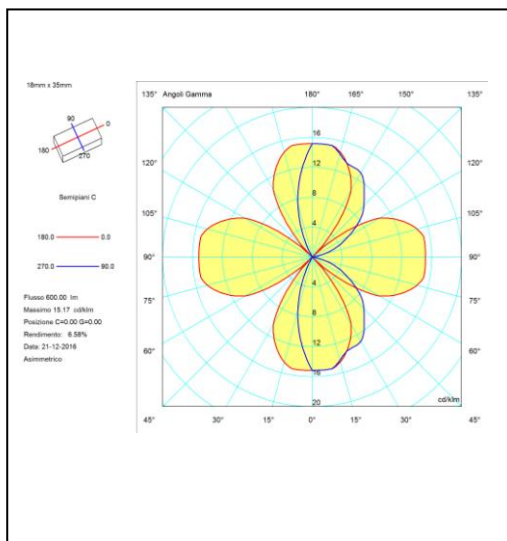

Accessories available on request:



code **0404M009**
Single connection IP68

