



Type 240
K 191, K 192

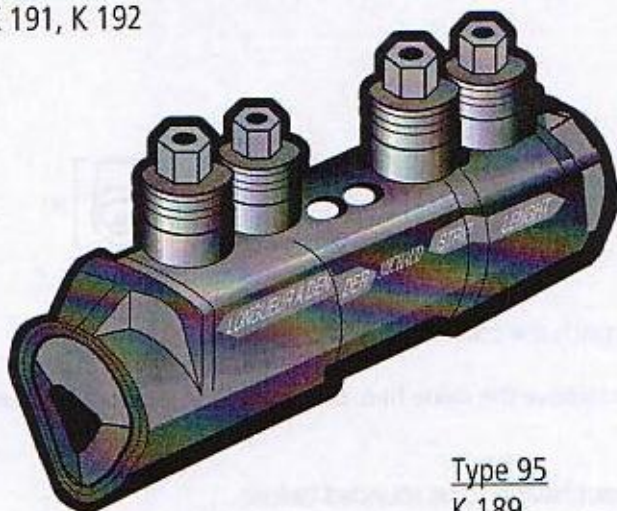

Type 95
K 189

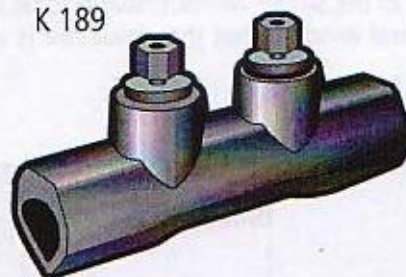

NETWORK PREINSULATED SLEEVE WITH MECHANICAL TIGHTENING

APPLICATION

This sleeve is used to connect aluminium or copper conductors.


It is not necessary to round the sectoral cores before insertion and implementation is carried out with a 13 mm spanner.

It respectively suits aluminium conductors of 240 mm² (K 192, K 191) and aluminium or copper conductors of 95 mm² (K 189).

DESCRIPTION

- Dielectric strength in water is over 6 kV.
- Materials used are protected against UV lights and can be used outside.
- The preinsulated sleeve type 95 can receive the round and sectoral sections.

Window in the middle to be sure of the complete insertion of the conductor

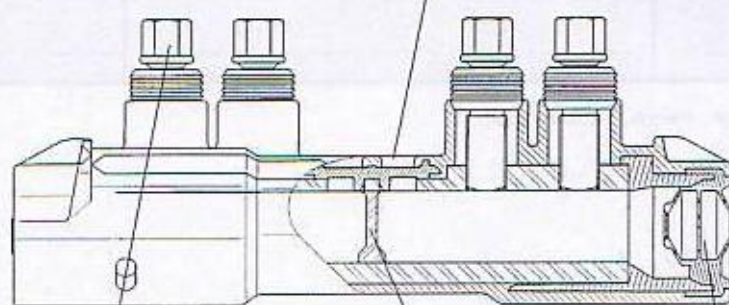

*13 mm hexagonal
shear head breaks at
tightening torque*

Thrust to stop conductors

*Sealing
gaskets*

