



FLF LED

SURFACE
IP40



Dimensions

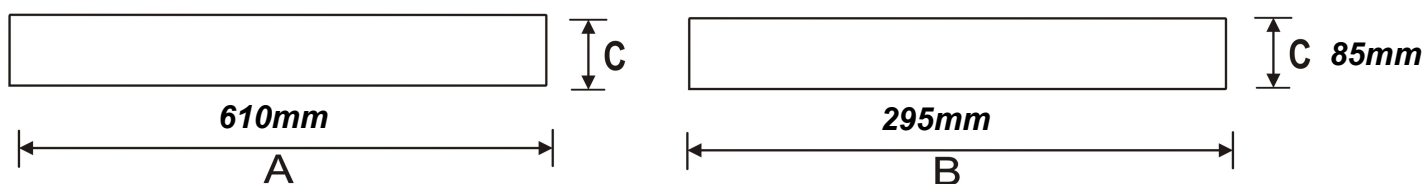

LED		ECG	IP40				5 years warranty	50,000 hrs L80/B20 Ta=25°C	220-240V 50-60Hz		CE
-----	--	-----	------	--	--	--	------------------	----------------------------------	---------------------	--	----

FLF LED

FLF LED

Surface

LIGHT OUTPUT

30W / 3600 lm

EFFICIENCY

up to 120 lm/W

WIRING

ECG, on request: DALI, 1-10V Sensor (Tridonic, Hytronic)
On request: Emergency kit

CCT

3000K

CRI

≥ 80 Ra

MATERIALS

> Housing

Sheet steel

> Diffuser

Opal PMMA

>

LIGHT DISTRIBUTION

Direct

ADVANTAGES

SURFACE FINISH

White color (RAL9003); other colors on request

ACCESSORIES