

Fog_s 200 | 21 W | diffuse | Wall recessed



Also available for wall/ceiling and ceiling recessed

Technical Specifications

Source lamp	LED 21 W
Total wattage	12
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	942 lm (2920 lm*) @ 3000 K
Luminous efficacy	36 lm/W @ 3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	III

Materials


Body	Die-cast aluminium EN47100
Diffuser	Opal glass
Finishing	White - Polyester powder paint

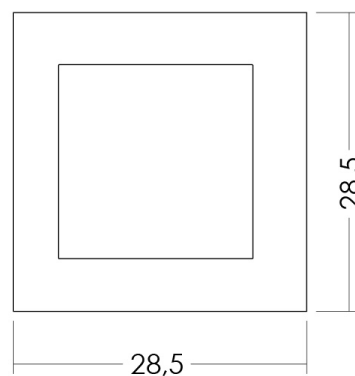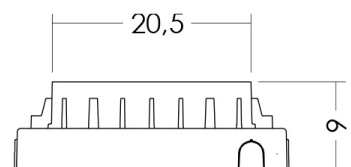

E (lux)

H(m)	lux (3000 K)	Ø(m)
1.00	280	3.90
2.00	70	7.78
3.00	31	11.68
4.00	17	15.57
5.00	11	19.46

Photometry

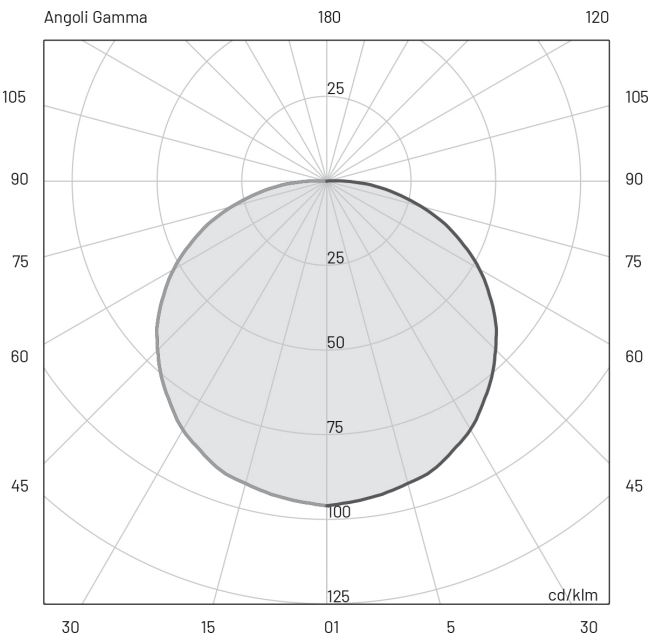

Included accessories

-	0.5 m length cable -05RN-F
-	Housing box

Available accessories

0303004	Glass lifting suction pad
00KCGQ.04	Recessed box adjusting kit
0404M011	Single connection IP68
0404M019	Three-way connection box mini