

NAV-T SUPER 4Y 70 W E27

VIALOX NAV-T SUPER 4Y | High-pressure sodium vapor lamps



- Industrial installations
- Streets
- Tunnels, underpasses
- Car parks, courtyards
- Parks and gardens
- Buildings, monuments, bridges

Product benefits

- Dimmable on conventional control gears and electronic control gears
- Optimum energy efficiency on POWERTRONIC PTo 3DIM ECGs
- Up to 25 % longer life than standard lamps
- Greater reliability than standard lamps
- Up to 20 % higher luminous efficiency than standard lamps
- Greater mast spacing possible than with standard lamps
- Better luminous flux maintenance than standard lamps
- Four year relamping cycle

Product features

- Lamp survival factor: ≥ 95 % after 16,000 hours burning time (for $P \geq 70$ W)



Technical data

Electrical data

Nominal wattage	70 W
PFC capacitor at 50 Hz	12 μF ¹⁾
Rated wattage	71 W
Lamp current	1 A
Rated lamp efficacy (standard condition)	93 lm/W


¹⁾ At rated voltage and $\cos \varphi \geq 0.9$

Light technical data


Nominal luminous flux	6600 lm
Color rendering group	4
Rated luminous flux	6600 lm
Color temperature	2000 K
Color rendering index Ra	20
Luminance	360 cd/cm^2
Rated LLMF at 2,000 h	0.92
Rated LLMF at 4,000 h	0.91
Rated LLMF at 6,000 h	0.90
Rated LLMF at 8,000 h	0.89
Rated LLMF at 12,000 h	0.89
Rated LLMF at 16,000 h	0.88
Rated LLMF at 20,000 h	0.88

Dimensions & weight

Diameter	38.0 mm
Length	156.0 mm
Light center length (LCL)	104.0 mm

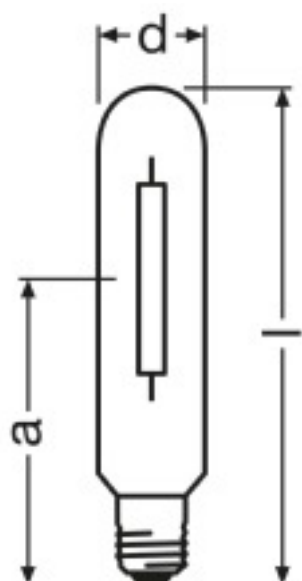

Product line drawing with letters

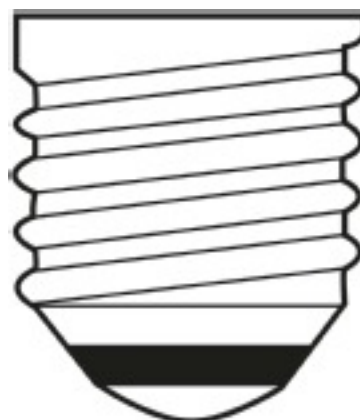

E27
IEC 7004-21

Base



E 27

Base

Colors & materials

Lamp mercury content	19.0 mg
Mercury-free	No

Temperatures

Maximum permitted outer bulb temperature	310 °C
Maximum permitted base edge temperature	210 °C

Lifespan

Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.98
Rated lamp survival factor at 6,000 h	0.98
Rated lamp survival factor at 8,000 h	0.97
Rated lamp survival factor at 12,000 h	0.96
Rated lamp survival factor at 16,000 h	0.95
Rated lamp survival factor at 20,000 h	0.90
Operation mode LLMF/LSF	50 Hz

Additional product data

Base (standard designation)	E27
Design / version	Clear
Footnote used only for product	Important: Before replacing for NAV Standard lamps in existing installations, check that the igniters are suitable

Capabilities

Dimmable	Yes
Burning position	Any

Country specific categorizations

ILCOS	ST-70/20/4-H-E27-38/156
-------	-------------------------

Lamp-ECG combination (System)

PTo 70 3 DIM

Nominal wattage + Power loss	0.00 (W)
------------------------------	----------

Products

PTo 70/220-240 3DIM

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.