


ALED

SURFACE
IP54 / IK06

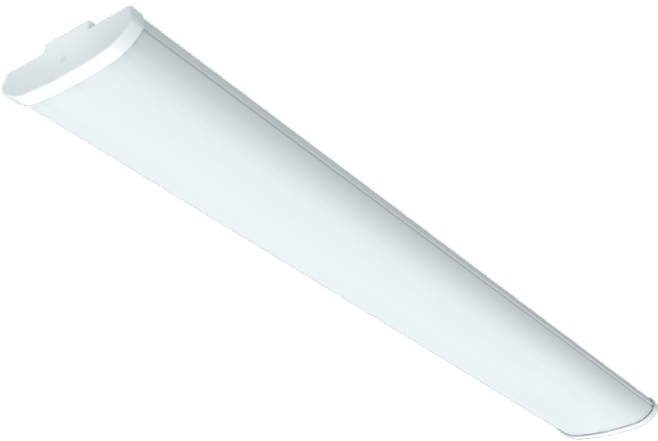

on request

5 years
warranty

50,000 hrs
L80/B10
Ta=25°C

220-240V
50-60Hz



ALED

ALED

Surface

ALED

cabled for LED tubes
Surface

LIGHT OUTPUT

up to 8600 lm

depends of LED tubes

EFFICIENCY

up to 128 lm/W

depends of LED tubes

WIRING

ECG, on request: DALI, 1-10V
On request: Emergency kit (1h, 3h, exclude 20W, 27W)

N/A

CCT

3000 - 4000K

depends of LED tubes

CRI

≥ 80 Ra

depends of LED tubes

MATERIALS

> Housing

Sheet steel

Sheet steel

> Diffuser

Opal Polycarbonate

Opal Polycarbonate

> End caps

ABS

ABS

LIGHT DISTRIBUTION

Direct

Direct

ADVANTAGES

Impact-resistant (IK06)

Impact-resistant (IK06)

SURFACE FINISH


White color (RAL9003); other colors on request

White color (RAL9003); other colors on request

ACCESSORIES

Cable gland for end cup PG 11
(purchase code: CG-PG11)

N/A




ELEGANT OPAL ABS END CAPS




OPAL POLYCARBONATE (PC)

drawing ALED




drawing ALED, cabled for LED Tubes



Net lumen output	CCT	Power	Wiring	Dimensions	Weight	ACS	Purchase code
(lm)	(K)	(W)		(mm)	(kg)	#	
2300	3000	20	ECG	A: 612	2.01	1	AS.60-20-2300/9.3/IP54O2
2500	4000	20	ECG	A: 612	2.01	1	AS.60-20-2500/9.4/IP54O2
3100	3000	27	ECG	A: 612	2.01	1	AS.60-27-3100/9.3/IP54O2
3300	4000	27	ECG	A: 612	2.01	1	AS.60-27-3300/9.4/IP54O2
4600	3000	36	ECG	A: 1172	2.54	1	AS.120-36-4600/9.3/IP54O2
4900	4000	36	ECG	A: 1172	2.54	1	AS.120-36-4900/9.4/IP54O2
6400	3000	52	ECG	A: 1172	2.54	1	AS.120-52-6400/9.3/IP54O2
6700	4000	52	ECG	A: 1172	2.54	1	AS.120-52-6700/9.4/IP54O2
5900	3000	45	ECG	A: 1452	3.65	1	AS.150-45-5900/9.3/IP54O2
6300	4000	45	ECG	A: 1452	3.65	1	AS.150-45-6300/9.4/IP54O2
8000	3000	67	ECG	A: 1452	3.65	1	AS.150-67-8000/9.3/IP54O2
8600	4000	67	ECG	A: 1452	3.65	1	AS.150-67-8600/9.4/IP54O2
#	Accessories (ACS)					Purchase code	
1	Cable gland for end cup PG 11					CG-PG11	

ALED

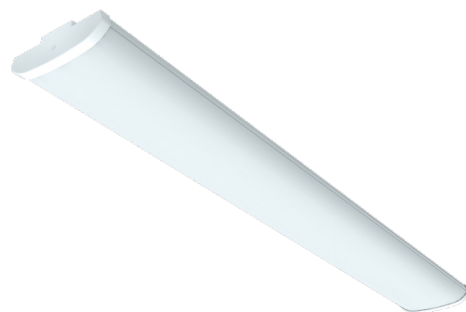

Description	Dimensions	Weight	ACS	Purchase code
	(mm)	(kg)	#	
AS 2x ..600mm,Opal diffuser IP54, cabled for LED tubes	A: 673	1.75	N/A	AS.2x.60/_/IP54O2W
AS 2x ..1200mm,Opal diffuser IP54, cabled for LED tubes	A: 1282	2.05	N/A	AS.2x120/_/IP54O2W
AS 2x ..1600mm,Opal diffuser IP54, cabled for LED tubes	A: 1583	3.05	N/A	AS.2x160/_/IP54O2W

ALED
CABLED FOR LED TUBES