


Fog_1 300 | 12 W | diffuse | Projectors

Also available for ceiling/wall and ceiling/wall recessed

Technical Specifications

Source lamp	LED 12 W
Total wattage	16
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	510 lm (1340 lm*) @ 3000 K
Luminous efficacy	32 lm/W @ 3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I

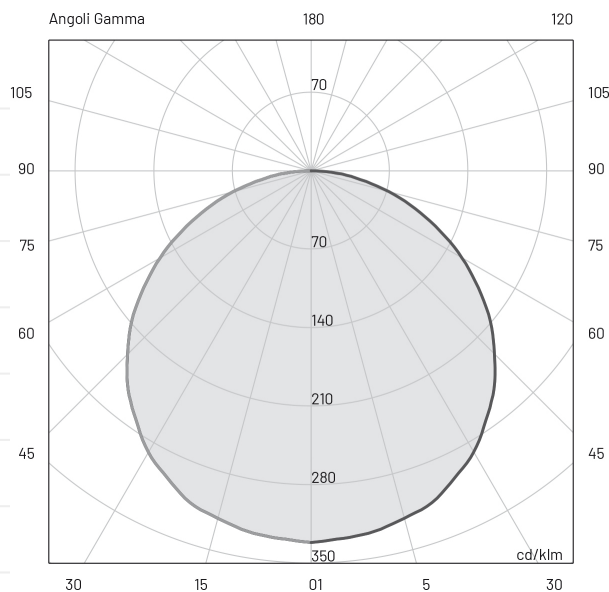

Materials

Body	Extruded aluminium EN AW6060
Diffuser	Opal glass
Finishing	Black - Polyester powder paint

E (lux)

H(m)	lux (3000 K)	Ø(m)
1.00	169	3.21
2.00	42	6.42
3.00	19	9.62
4.00	11	12.83
5.00	7	16.04

Included accessories

-	1 m length cable -05RN-F
-	Fixing kit short (7,5 cm)
-	Single connection IP68

Available accessories

00KEYFGL.250_	Fixing kit long (25 cm)
	Fixing kit long (25cm)
00KEYFGL.150_	Fixing kit medium (15 cm)
	Fixing kit medium (15cm)