
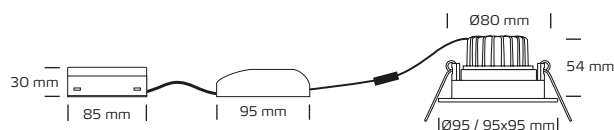
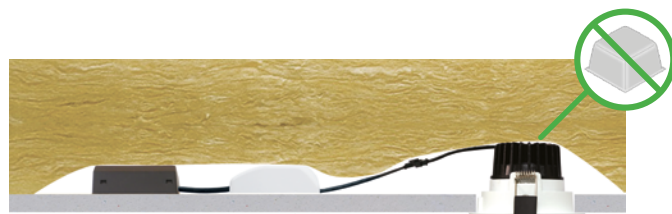
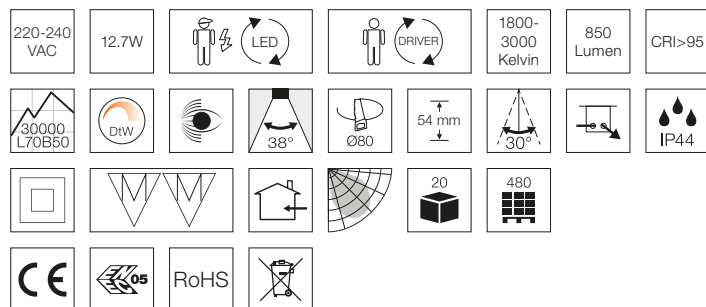


## Velia Tilt 12.7W Dim to Warm

### Technical data

Voltage	220-240 VAC 50 Hz
System effect	10.9W
Light source	Dim to Warm 11W LED, item no. 31120007 
Colour temperature	1800-3000 Kelvin
Light intensity	850 Lumen
Colour rendering	CRI>95
Expected lifespan	30,000 hours L70 B50
Dimmable	Yes, trailing edge
Flicker free	Yes, according to the new Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<3
Beam angle	38°
Carving dimensions	Ø80 mm
Installation height	54 mm
Exterior dimensions	Ø95 mm
Dimensions driver	L: 143 mm, W: 46 mm, H: 30 mm
Dimensions connector box	L: 85 mm, W: 55 mm, H: 30 mm
Tilt angle	38°
Possibility of through wiring	Yes, 3G1.5
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Plastic, aluminium, glass
Environment	Indoors
Warranty	5 years
Approvals	CE



\*The drawing is not drawn to scale

### Product information

- Approved for installation directly in insulation and flammable materials
- High colour rendering index (CRI)
- High lumen output
- Glare free
- Flicker free according to the new Ecodesign / ErP directive
- Color temperature (Kelvin) changes by dimming
- Mounting with springs
- Comes with removable driver, which makes it easy to connect the downlight, for example after painting of the ceiling
- Quick and easy mounting
- Screwless terminal block in the connector box
- Ceiling thickness for mounting is up to 26 mm

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
31121017	5704629000032	Matt white	Round
31121097	5704629000896	Matt black	Round