

## RK 750 V Plastisolert koblingsledning.

**RK 750V 1,5 G/G**

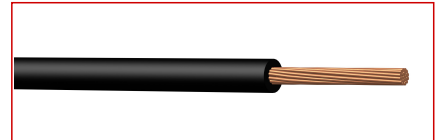
H07V-K

**Nexans ref.: 10022597****El. nummer: 1050536****GTIN (EAN 13): 7045210016604**


Plastisolert koblingsledning

### Beskrivelse

Koblingsledning med mangetrådet kobberleder. Anbefalt brukt der det er hesiktsmessig å benytte fleksible ledninger, f.eks ved tavlebygging.



### Standarder

**Internasjonal** EN 50265; HD 21.3;  
IEC 60332-1**Norsk** NEK-HD 21.3Blyfri  
JaNormert spenning i 3 fase systemer U<sub>0</sub>/  
U  
450 / 750 VMax.conductor temp.in service  
70 °CRoHS conform  
Ja

## RK 750 V Plastisolert koblingsledning.

**RK 750V 1,5 G/G**
**Nexans ref.: 10022597**

### Egenskaper

#### Konstruksjonsegenskaper

|                |                       |
|----------------|-----------------------|
| Kapfefarge     | Gul/grønn             |
| Lederform      | Mangetrådet           |
| Ledermateriale | Glødd kobber          |
| Isolasjon      | Polyvinylklorid - PVC |
| Blyfri         | Ja                    |

#### Dimensjonsegenskaper

|                        |                     |
|------------------------|---------------------|
| Lederdiameter          | 1,6 mm              |
| Nominell ytre diameter | 3,0 mm              |
| Antall ledere          | 1                   |
| Ledertverrsnitt        | 1,5 mm <sup>2</sup> |
| Vekt (ca.)             | 2,0 kg/100m         |


#### Elektriske egenskaper

|                                                      |             |
|------------------------------------------------------|-------------|
| Normert spenning i 3 fase systemer U <sub>0</sub> /U | 450 / 750 V |
|------------------------------------------------------|-------------|

#### Bruksegenskaper

|                               |        |
|-------------------------------|--------|
| Lengde                        | 150 m  |
| Forpakning                    | Snelle |
| Maks. tillatt ledertemperatur | 70 °C  |
| RoHS conform                  | Ja     |


Blyfri  
Ja

Normert spenning i 3 fase systemer U<sub>0</sub>/  
U  
450 / 750 V

Max.conductor temp.in service  
70 °C

RoHS conform  
Ja