

Enclosures

HIL-BOX® enclosure system including diaphragms, screwed cover

shock resistant enclosures including **moulded glands** in soft material. Cover fixed by stainless steel screws.


protection spec.: IP 65 acc. DIN EN 60529/DIN 40050

material: base and lid ABS (UV resistant, halogen free), membrane entry rubber

installation temp.: -5°C up to +60°C acc. DIN EN 60670

temperature resistance: max. 70°C acc. DIN EN 60695-10-2

flame protection: 650°C acc. DIN EN 60695-2-11

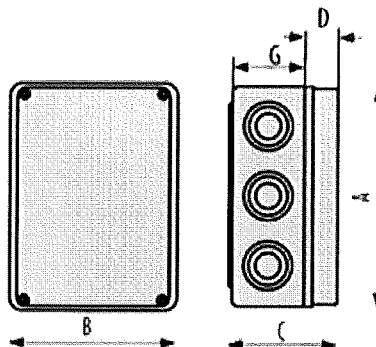

Item Number 55260

HIL-BOX® enclosure system

A [mm]	190,00
B [mm]	145,00
C [mm]	70,00
G [mm]	55,00
D [mm]	25,00
Ø membranes	37,00
membranes	10,00

[Download PDF](#)



Hilpress GmbH
Grütmühlenweg 40
D-22339 Hamburg
Web: www.hilpress.com
eMail: export@hilpress.de

Date: 17.01.2013