

Cable ladder LCIS



Cable ladder with 60 mm side height with welded C30 profile rungs which are open in an upwards direction. Rolled side rail for reinforcement and as edge protection. Fastening to the bracket takes place using clamps, type LKS 40. The slot dimension of the frame is 16.5 mm and the appropriate clamp clip is type 2056.

Magnetic shield insulation without cover 10 dB, with cover 15 dB.


Type	Width mm	Rail thickness mm	Pack. m	Weight kg/100 m	Item No.
LCIS 620 3 FS	200	1,5	3	266,670	6209610
LCIS 630 3 FS	300	1,5	3	288,670	6209612
LCIS 640 3 FS	400	1,5	3	310,340	6209614
LCIS 650 3 FS	500	1,5	3	332,340	6209616
LCIS 660 3 FS	600	1,5	3	354,000	6209618
LCIS 620 3 FT	200	1,5	3	283,000	6209721
LCIS 630 3 FT	300	1,5	3	306,000	6209723
LCIS 640 3 FT	400	1,5	3	329,340	6209725
LCIS 650 3 FT	500	1,5	3	352,340	6209727
LCIS 660 3 FT	600	1,5	3	375,340	6209729
LCIS 620 6 FS	200	1,5	6	267,170	6209630
LCIS 630 6 FS	300	1,5	6	288,840	6209632
LCIS 640 6 FS	400	1,5	6	310,670	6209634
LCIS 650 6 FS	500	1,5	6	332,340	6209636
LCIS 660 6 FS	600	1,5	6	354,000	6209638
LCIS 620 6 FT	200	1,5	6	283,170	6209643
LCIS 630 6 FT	300	1,5	6	306,170	6209645
LCIS 640 6 FT	400	1,5	6	329,170	6209647
LCIS 650 6 FT	500	1,5	6	352,340	6209649
LCIS 660 6 FT	600	1,5	6	375,340	6209651

St Steel

FS Strip-galvanised

FT Hot-dip galvanised

Dimensions

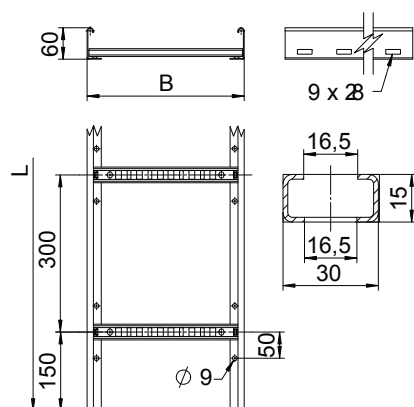

Type	Length mm	Width mm	Rail thickness mm	Useful cross- section cm ²	Rung spacing mm
LCIS 620 3 FS	3000	200	1,5	80	300
LCIS 630 3 FS	3000	300	1,5	120	300
LCIS 640 3 FS	3000	400	1,5	160	300
LCIS 650 3 FS	3000	500	1,5	200	300
LCIS 660 3 FS	3000	600	1,5	240	300
LCIS 620 3 FT	3000	200	1,5	80	300
LCIS 630 3 FT	3000	300	1,5	120	300
LCIS 640 3 FT	3000	400	1,5	160	300
LCIS 650 3 FT	3000	500	1,5	200	300
LCIS 660 3 FT	3000	600	1,5	240	300
LCIS 620 6 FS	6000	200	1,5	80	300
LCIS 630 6 FS	6000	300	1,5	120	300
LCIS 640 6 FS	6000	400	1,5	160	300
LCIS 650 6 FS	6000	500	1,5	200	300
LCIS 660 6 FS	6000	600	1,5	240	300
LCIS 620 6 FT	6000	200	1,5	80	300
LCIS 630 6 FT	6000	300	1,5	120	300
LCIS 640 6 FT	6000	400	1,5	160	300
LCIS 650 6 FT	6000	500	1,5	200	300
LCIS 660 6 FT	6000	600	1,5	240	300

Cable ladder LCIS

Load

Type 1.5 m 2.0 m 2.5 m 3.0 m 4.0 m
kN/m kN/m kN/m kN/m kN/m

LCIS 620 3 FS	3,3	2	1,3	1	0,4
LCIS 630 3 FS	3,3	2	1,3	1	0,4
LCIS 640 3 FS	3,3	2	1,3	1	0,4
LCIS 650 3 FS	3,3	2	1,3	1	0,4
LCIS 660 3 FS	3,3	2	1,3	1	0,4
LCIS 620 3 FT	3,3	2	1,3	1	0,4
LCIS 630 3 FT	3,3	2	1,3	1	0,4
LCIS 640 3 FT	3,3	2	1,3	1	0,4
LCIS 650 3 FT	3,3	2	1,3	1	0,4
LCIS 660 3 FT	3,3	2	1,3	1	0,4
LCIS 620 6 FS	3,3	2	1,3	1	0,4
LCIS 630 6 FS	3,3	2	1,3	1	0,4
LCIS 640 6 FS	3,3	2	1,3	1	0,4
LCIS 650 6 FS	3,3	2	1,3	1	0,4
LCIS 660 6 FS	3,3	2	1,3	1	0,4
LCIS 620 6 FT	3,3	2	1,3	1	0,4
LCIS 630 6 FT	3,3	2	1,3	1	0,4
LCIS 640 6 FT	3,3	2	1,3	1	0,4
LCIS 650 6 FT	3,3	2	1,3	1	0,4
LCIS 660 6 FT	3,3	2	1,3	1	0,4

Load diagram LCIS 60

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width

