


## Connector PowerTOP® Xtra - Part no. 14218



- screw terminals
- with rubberised grip area
- frame terminals
- 63A: SoftCONTACT, 125A: TorsionSpringCONTACT
- with highly heat resistant contact carrier
- cable gland and sealing
- strain relief and protection against kinking
- enclosure with thread lock
- two safety slides
- Products with pilot contacts: Part no. + index P

Protection type	IP 67
Ampere	125A
Poles	4p
Voltage	230V
Hertz	50-60 Hz
Earth position	9h
Contact	highly heat resistant contact carrier
Connection technology	Screw terminals, TorsionSpringCONTACT
Shutter	

Std. Pack. 5 Qty.

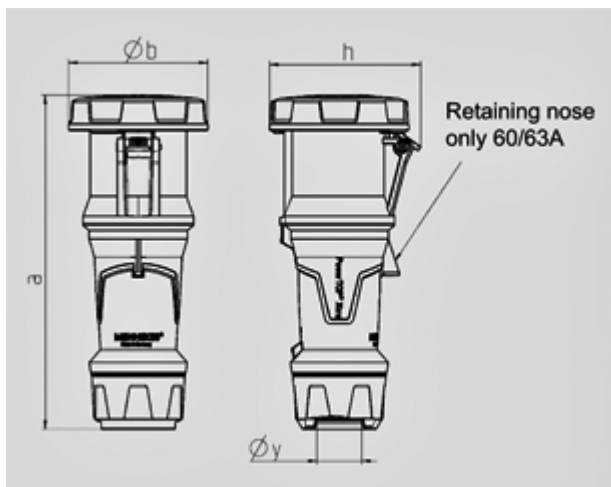

Drawing	Amp. Poles	63			125		
		3	4	5	3	4	5
Dim. in mm	a	270	270	270	310	310	310
	b	113	113	113	125	125	125
	h	123	123	123	135	135	135
	y	36	36	36	49	49	49
Terminal for cond. cross		6	6	6	25	25	25
section (mm²) min.-max.		—16	—16	—16	—50	—50	—50