


Mira 220 | 19.5 W | medium 30° | Floor recessed

Round frame for flush-mounted installation

Technical Specifications

Source lamp	LED 19.5 W
Total wattage	23
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	1465 lm (2093 lm*) @ 3000 K
Luminous efficacy	64 lm/W @ 3000 K
McADAM steps	3
Beam	medium 30°
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I

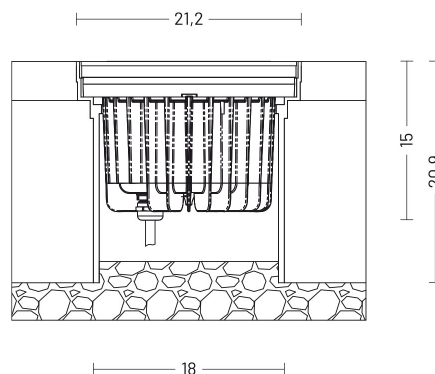


Materials

Body	Die-cast aluminium EN47100
Diffuser	Extra clear tempered glass 19 mm
Finishing	Inox AISI 316L - Inox AISI 316L

E (lux)

H(m)	lux (3000 K)	Ø (m)
1.00	4300	0.5
2.00	1070	1.1
3.00	470	1.6
4.00	270	2.2
5.00	170	2.8

Photometry

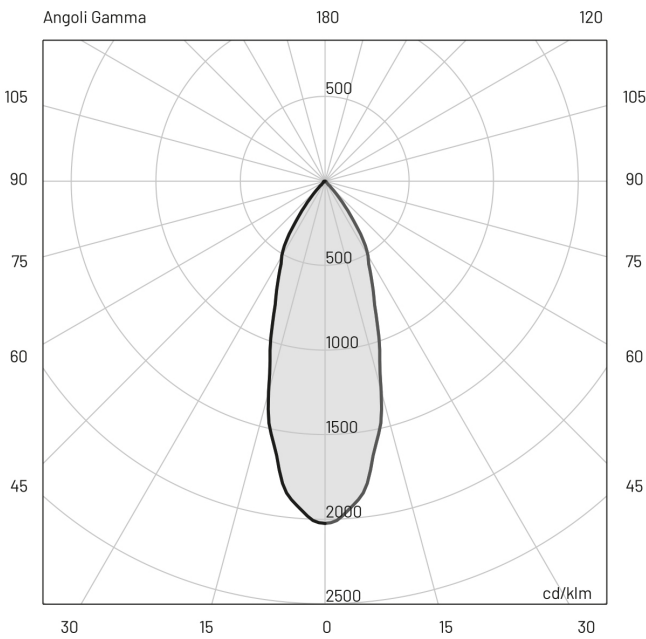

Included accessories

-	2 m length cable H07RN-F
-	Housing box

Available accessories

0404M003	Loop-in loop-out IP68
0201001V0400	Non-slip glass
0201001V0200	Sandblasted glass
00KAV04	Set antivandalism screws
0303CA3	Tool for antivandalism screws