



Widest product range in the world!

MASTER PL-T is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Benefits

- Optimal light performance for short or long operation per switch-on
- Substantially more light (about 15% more) per light point than with other similar shapes
- Multiple light color choice
- Good color rendering (CRI > 80)
- Dimming possible down to 10%

Features

- 4-pin base
- Philips' bridging technology applied
- Fluorescent tri-phosphor technology
- Low light depreciation over lamp life
- Fast light run-up

Environment

- Good environmental choice because of high energy efficiency, long life and low light output depreciation, lowest mercury content
- Compliant with all RoHS and WEEE requirements: the lamps have a very low content of mercury, are lead free and make no use of radioactive materials and hazardous flame retardants

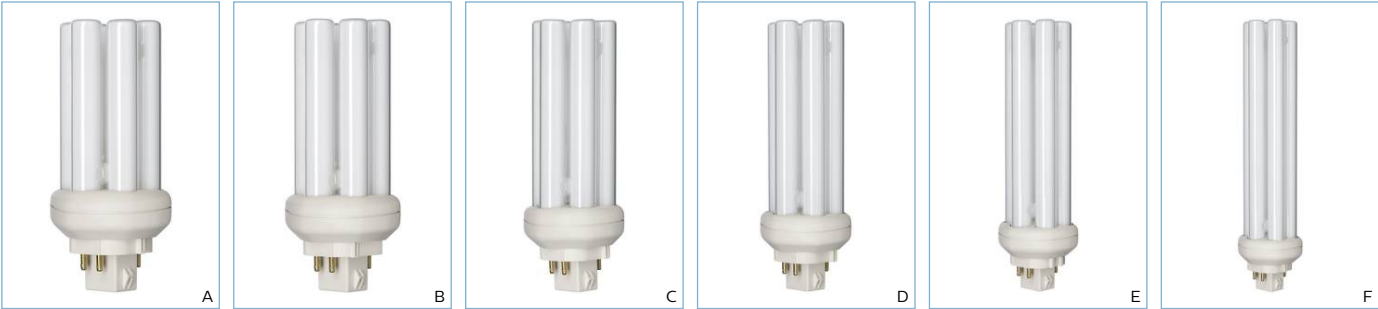
Application


- Designed for general or supplementary lighting in professional and semi-professional environments
- Ideal for use in recessed or surface mounted downlighters, wall units, outdoor lighting
- First choice for short switching cycles, emergency lighting and deep dimming


Warnings and Safety


- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product Range




				
mm	A	B	C	D
	max.	max.	max.	max.
1	66.7	91	106.7	41

				
mm	A	B	C	D
	max.	max.	max.	max.
2	71.7	96	111.7	41

				
mm	A	B	C	D
	max.	max.	max.	max.
3	86.7	111	126.7	41
4	98.7	123	138.7	41

				
mm	A	B	C	D
	max.	max.	max.	max.
5	120.7	145	160.7	41

				
mm	A	B	C	D
	max.	max.	max.	max.
6	157.7	182	197.7	41

Main Data

MASTER PL-T

Wattage/Light source color/Pins			Luminous Flux (Rated)	Life to 50% Failures Preheat	Energy Consumption kWh/1000 h			Photo letter	Ordering number 8711500...
			(lm)	(h)	(kWh)		mm		
12.5W/840/4P	CT / 50	GX24Q-1	850	13,000	15	A	1	A	61047870
16.5W/827/4P	CT / 50	GX24Q-2	1,200	13,000	20	A	2	B	55982170
16.5W/830/4P	CT / 50	GX24Q-2	1,200	13,000	20	A	2	B	61076870
16.5W/840/4P	CT / 50	GX24Q-2	1,200	13,000	20	A	2	B	61099770
24W/827/4P	CT / 50	GX24Q-3	1,725	13,000	29	A	3	C	55993770
24W/830/4P	CT / 50	GX24Q-3	1,725	13,000	29	A	3	C	61120870
24W/840/4P	CT / 50	GX24Q-3	1,725	13,000	29	A	3	C	61125370
32W/827/4P	CT / 50	GX24Q-3	2,400	13,000	35	A	4	D	55996870
32W/830/4P	CT / 50	GX24Q-3	2,400	13,000	35	A	4	D	61128470
32W/840/4P	CT / 50	GX24Q-3	2,400	13,000	35	A	4	D	61131470
41W/827/4P	CT / 50	GX24Q-4	3,050	13,000	45	A	5	E	56002570
41W/830/4P	CT / 50	GX24Q-4	3,050	13,000	45	A	5	E	61134570
41W/840/4P	CT / 50	GX24Q-4	3,050	13,000	45	A	5	E	61137670
56W/830/4P	CT / 50	GX24Q-5	4,200	13,000	59	A	6	F	61140670
56W/840/4P	CT / 50	GX24Q-5	4,200	13,000	59	A	6	F	61145170

Electrical data

Commercial product name	Lamp Current	Calibration Current	Power (Rated)	Resistor	HF Generator Rated Voltage
	(A)	(A)	(W)	(Ω)	(V)
MASTER PL-T 13W/840/4P 1CT/5X10BOX	0.170		12.5		
MASTER PL-T 18W/827/4P 1CT/5X10BOX	0.225		16.5		
MASTER PL-T 18W/830/4P 1CT/5X10BOX	0.225		16.5		
MASTER PL-T 18W/840/4P 1CT/5X10BOX	0.210		16.5		
MASTER PL-T 26W/827/4P 1CT/5X10BOX	0.300		24.0		
MASTER PL-T 26W/830/4P 1CT/5X10BOX	0.300		24.0		
MASTER PL-T 26W/840/4P 1CT/5X10BOX	0.300		24.0		
MASTER PL-T 32W/827/4P 1CT/5X10BOX	0.320	0.32	32.0	315	200
MASTER PL-T 32W/830/4P 1CT/5X10BOX	0.320	0.32	32.0	315	200
MASTER PL-T 32W/840/4P 1CT/5X10BOX	0.320	0.32	32.0	315	200
MASTER PL-T 42W/827/4P 1CT/5X10BOX	0.320	0.32	41.0	420	270
MASTER PL-T 42W/830/4P 1CT/5X10BOX	0.320	0.32	41.0	420	270
MASTER PL-T 42W/840/4P 1CT/5X10BOX	0.320	0.32	41.0	420	270
MASTER PL-T 57W/830/4P 1CT/5X10BOX	0.325	0.32	56.0	1,200	560
MASTER PL-T 57W/840/4P 1CT/5X10BOX	0.325	0.32	56.0	1,200	560

Lifetime data

Commercial product name	Life to 10% Failures Non Preheat	Life to 10% Failures Preheat	Life to 50% Failures Non Preheat	Life to 50% Failures Preheat
	(h)	(h)	(h)	(h)
MASTER PL-T 13W/840/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 18W/827/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 18W/830/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 18W/840/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 26W/827/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 26W/830/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 26W/840/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 32W/827/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 32W/830/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 32W/840/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 42W/827/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 42W/830/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 42W/840/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 57W/830/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000
MASTER PL-T 57W/840/4P 1CT/5X10BOX	4,500	8,000	7,000	13,000

Color data

Commercial product name	Colour Rendering Index	Light source color ¹	Color Designation	Chromaticity Coordinate X	Chromaticity Coordinate Y
MASTER PL-T 13W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)	380	379
MASTER PL-T 18W/827/4P 1CT/5X10BOX	82	827	Incandescent White	455	417
MASTER PL-T 18W/830/4P 1CT/5X10BOX	>80	830	Warm White (WW)	434	397
MASTER PL-T 18W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)	380	379
MASTER PL-T 26W/827/4P 1CT/5X10BOX	82	827	Incandescent White	455	417
MASTER PL-T 26W/830/4P 1CT/5X10BOX	>80	830	Warm White (WW)	434	397
MASTER PL-T 26W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)	380	379
MASTER PL-T 32W/827/4P 1CT/5X10BOX	82	827	Incandescent White	455	417
MASTER PL-T 32W/830/4P 1CT/5X10BOX	>80	830	Warm White (WW)	434	397
MASTER PL-T 32W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)	380	379
MASTER PL-T 42W/827/4P 1CT/5X10BOX	82	827	Incandescent White	455	417
MASTER PL-T 42W/830/4P 1CT/5X10BOX	>80	830	Warm White (WW)	434	397
MASTER PL-T 42W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)	380	379
MASTER PL-T 57W/830/4P 1CT/5X10BOX	>80	830	Warm White (WW)	434	397
MASTER PL-T 57W/840/4P 1CT/5X10BOX	82	840	Cool White (CW)	380	379

¹ 'Light source color' value description(s): '827' = CCT of 2700K, '830' = CCT of 3000K, '840' = CCT of 4000K

Luminous flux/efficacy/intensity data

Commercial product name	Luminous Flux (Rated) (lm)	Luminous Flux (lm)
MASTER PL-T 13W/840/4P 1CT/5X10BOX	850	900
MASTER PL-T 18W/827/4P 1CT/5X10BOX	1,200	1,200
MASTER PL-T 18W/830/4P 1CT/5X10BOX	1,200	1,200
MASTER PL-T 18W/840/4P 1CT/5X10BOX	1,200	1,200
MASTER PL-T 26W/827/4P 1CT/5X10BOX	1,725	1,800
MASTER PL-T 26W/830/4P 1CT/5X10BOX	1,725	1,800
MASTER PL-T 26W/840/4P 1CT/5X10BOX	1,725	1,800
MASTER PL-T 32W/827/4P 1CT/5X10BOX	2,400	2,400
MASTER PL-T 32W/830/4P 1CT/5X10BOX	2,400	2,400
MASTER PL-T 32W/840/4P 1CT/5X10BOX	2,400	2,400
MASTER PL-T 42W/827/4P 1CT/5X10BOX	3,050	3,200
MASTER PL-T 42W/830/4P 1CT/5X10BOX	3,050	3,200
MASTER PL-T 42W/840/4P 1CT/5X10BOX	3,050	3,200
MASTER PL-T 57W/830/4P 1CT/5X10BOX	4,200	4,300
MASTER PL-T 57W/840/4P 1CT/5X10BOX	4,200	4,300

Rated Lumen Maintenance data

Commercial product name	LLMF 2000 h Rated (%)	LLMF 4000 h Rated (%)	LLMF 6000 h Rated (%)	LLMF 8000 h Rated (%)	LLMF 12000 h Rated (%)
MASTER PL-T 13W/840/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 18W/827/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 18W/830/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 18W/840/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 26W/827/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 26W/830/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 26W/840/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 32W/827/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 32W/830/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 32W/840/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 42W/827/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 42W/830/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 42W/840/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 57W/830/4P 1CT/5X10BOX	92	88	86	84	81
MASTER PL-T 57W/840/4P 1CT/5X10BOX	92	88	86	84	81

21



Temperature data

Commercial product name	Correlated Color Temperature (K)	Design Temperature (°C)	Default Ambient Temperature (°C)
MASTER PL-T 13W/840/4P 1CT/5X10BOX	4,000	28	25
MASTER PL-T 18W/827/4P 1CT/5X10BOX	2,700	28	25
MASTER PL-T 18W/830/4P 1CT/5X10BOX	3,000	28	25
MASTER PL-T 18W/840/4P 1CT/5X10BOX	4,000	28	25
MASTER PL-T 26W/827/4P 1CT/5X10BOX	2,700	28	25
MASTER PL-T 26W/830/4P 1CT/5X10BOX	3,000	28	25
MASTER PL-T 26W/840/4P 1CT/5X10BOX	4,000	28	25
MASTER PL-T 32W/827/4P 1CT/5X10BOX	2,700	28	25
MASTER PL-T 32W/830/4P 1CT/5X10BOX	3,000	28	25
MASTER PL-T 32W/840/4P 1CT/5X10BOX	4,000	28	25
MASTER PL-T 42W/827/4P 1CT/5X10BOX	2,700	28	25
MASTER PL-T 42W/830/4P 1CT/5X10BOX	3,000	28	25
MASTER PL-T 42W/840/4P 1CT/5X10BOX	4,000	28	25
MASTER PL-T 57W/830/4P 1CT/5X10BOX	3,000	28	25
MASTER PL-T 57W/840/4P 1CT/5X10BOX	4,000	28	25

21



Environmental data & ETIM group & Design Requirements

Commercial product name	Energy Consumption kWh/1000 h (kWh)		Mercury (Hg) Content (mg)	ETIM Group ²
MASTER PL-T 13W/840/4P 1CT/5X10BOX	15	A	1.4	EC000087
MASTER PL-T 18W/827/4P 1CT/5X10BOX	20	A	1.4	EC000087
MASTER PL-T 18W/830/4P 1CT/5X10BOX	20	A	1.4	EC000087
MASTER PL-T 18W/840/4P 1CT/5X10BOX	20	A	1.4	EC000087
MASTER PL-T 26W/827/4P 1CT/5X10BOX	29	A	1.4	EC000087
MASTER PL-T 26W/830/4P 1CT/5X10BOX	29	A	1.4	EC000087
MASTER PL-T 26W/840/4P 1CT/5X10BOX	29	A	1.4	EC000087
MASTER PL-T 32W/827/4P 1CT/5X10BOX	35	A	1.4	EC000087
MASTER PL-T 32W/830/4P 1CT/5X10BOX	35	A	1.4	EC000087
MASTER PL-T 32W/840/4P 1CT/5X10BOX	35	A	1.4	EC000087
MASTER PL-T 42W/827/4P 1CT/5X10BOX	45	A	1.4	EC000087
MASTER PL-T 42W/830/4P 1CT/5X10BOX	45	A	1.4	EC000087
MASTER PL-T 42W/840/4P 1CT/5X10BOX	45	A	1.4	EC000087
MASTER PL-T 57W/830/4P 1CT/5X10BOX	59	A	1.4	EC000087
MASTER PL-T 57W/840/4P 1CT/5X10BOX	59	A	1.4	EC000087

² 'ETIM Group' value description(s): 'EC000087' = Compact Fluor Lamp Non Integrated

Rated Survival Factor data

Commercial product name	LSF Preheat 2000 h Rated (%)	LSF Preheat 4000 h Rated (%)	LSF Preheat 6000 h Rated (%)	LSF Preheat 8000 h Rated (%)	LSF Preheat 12000 h Rated (%)
MASTER PL-T 13W/840/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 18W/827/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 18W/830/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 18W/840/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 26W/827/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 26W/830/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 26W/840/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 32W/827/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 32W/830/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 32W/840/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 42W/827/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 42W/830/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 42W/840/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 57W/830/4P 1CT/5X10BOX	99	98	97	90	60
MASTER PL-T 57W/840/4P 1CT/5X10BOX	99	98	97	90	60

Friday 9th February, 2018

System data (electrical)

Commercial product name	Default Gear
MASTER PL-T 13W/840/4P 1CT/5X10BOX	Electronic
MASTER PL-T 18W/827/4P 1CT/5X10BOX	Electronic
MASTER PL-T 18W/830/4P 1CT/5X10BOX	Electronic
MASTER PL-T 18W/840/4P 1CT/5X10BOX	Electronic
MASTER PL-T 26W/827/4P 1CT/5X10BOX	Electronic
MASTER PL-T 26W/830/4P 1CT/5X10BOX	Electronic
MASTER PL-T 26W/840/4P 1CT/5X10BOX	Electronic
MASTER PL-T 32W/827/4P 1CT/5X10BOX	Electronic
MASTER PL-T 32W/830/4P 1CT/5X10BOX	Electronic
MASTER PL-T 32W/840/4P 1CT/5X10BOX	Electronic
MASTER PL-T 42W/827/4P 1CT/5X10BOX	Electronic
MASTER PL-T 42W/830/4P 1CT/5X10BOX	Electronic
MASTER PL-T 42W/840/4P 1CT/5X10BOX	Electronic
MASTER PL-T 57W/830/4P 1CT/5X10BOX	Electronic
MASTER PL-T 57W/840/4P 1CT/5X10BOX	Electronic

21



Operating data

Commercial product name	Default Burning Position		Default Cycle Time
MASTER PL-T 13W/840/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 18W/827/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 18W/830/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 18W/840/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 26W/827/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 26W/830/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 26W/840/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 32W/827/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 32W/830/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 32W/840/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 42W/827/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 42W/830/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 42W/840/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 57W/830/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle
MASTER PL-T 57W/840/4P 1CT/5X10BOX	Base up	Yes	3 hour cycle

Miscellaneous & General data

Commercial product name		Cap-Base Information ³	ILCOS Code
MASTER PL-T 13W/840/4P 1CT/5X10BOX	GX24Q-1	4P	FSM-13/40/1B-E-GX24q=1
MASTER PL-T 18W/827/4P 1CT/5X10BOX	GX24Q-2	4P	FSM-18/27/1B-E-GX24q=2
MASTER PL-T 18W/830/4P 1CT/5X10BOX	GX24Q-2	4P	FSM-18/30/1B-E-GX24q=2
MASTER PL-T 18W/840/4P 1CT/5X10BOX	GX24Q-2	4P	FSM-18/40/1B-E-GX24q=2
MASTER PL-T 26W/827/4P 1CT/5X10BOX	GX24Q-3	4P	FSM-26/27/1B-E-GX24q=3
MASTER PL-T 26W/830/4P 1CT/5X10BOX	GX24Q-3	4P	FSM-26/30/1B-E-GX24q=3
MASTER PL-T 26W/840/4P 1CT/5X10BOX	GX24Q-3	4P	FSM-26/40/1B-E-GX24q=3
MASTER PL-T 32W/827/4P 1CT/5X10BOX	GX24Q-3	4P	FSMH-32/27/1B-L/P-GX24q=3
MASTER PL-T 32W/830/4P 1CT/5X10BOX	GX24Q-3	4P	FSMH-32/30/1B-L/P-GX24q=3
MASTER PL-T 32W/840/4P 1CT/5X10BOX	GX24Q-3	4P	FSMH-32/40/1B-L/P-GX24q=3
MASTER PL-T 42W/827/4P 1CT/5X10BOX	GX24Q-4	4P	FSMH-42/27/1B-L/P-GX24q=4
MASTER PL-T 42W/830/4P 1CT/5X10BOX	GX24Q-4	4P	FSMH-42/30/1B-L/P-GX24q=4
MASTER PL-T 42W/840/4P 1CT/5X10BOX	GX24Q-4	4P	FSMH-42/40/1B-L/P-GX24q=4
MASTER PL-T 57W/830/4P 1CT/5X10BOX	GX24Q-5	4P	FSM6H-57/30/1B-L/P-GX24q=5
MASTER PL-T 57W/840/4P 1CT/5X10BOX	GX24Q-5	4P	FSM6H-57/40/1B-L/P-GX24q=5

³ 'Cap-Base Information' value description(s): '4P' = 4 Pins

Lamp	Photo letter		Ordering number 8711500...
12.5W	A	CT / 50	61047870
16.5W	B	CT / 50	55982170
16.5W	B	CT / 50	61076870

More data see next page

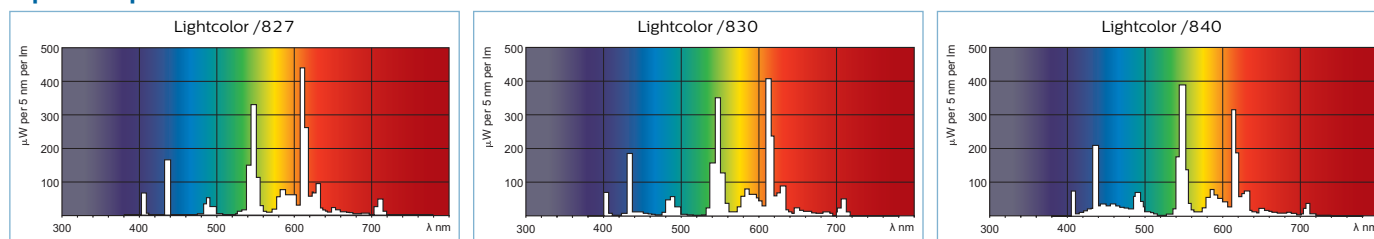
Lamp	Photo letter		Ordering number 8711500...
16.5W	B	CT / 50	61099770
24W	C	CT / 50	55993770
24W	C	CT / 50	61120870
24W	C	CT / 50	61125370
32W	D	CT / 50	55996870
32W	D	CT / 50	61128470
32W	D	CT / 50	61131470
41W	E	CT / 50	56002570
41W	E	CT / 50	61134570
41W	E	CT / 50	61137670
56W	F	CT / 50	61140670
56W	F	CT / 50	61145170

Logistic data

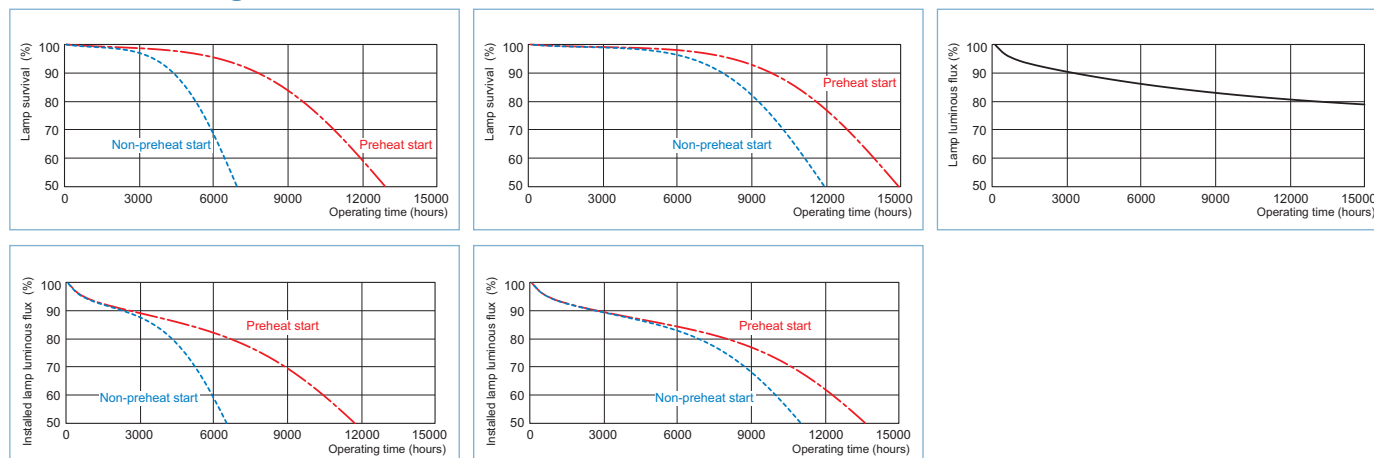
Commercial product name		⁴	Numerator - Packs per outer box	Ordering number 8711500...	Material Nr. (12NC) (9279...)	SAP Gross Weight (Piece) (g)	Net Weight (Piece) (g)	EAN-3 8711500...
MASTER PL-T 13W/840/4P 1CT/5X10BOX	CT / 50		50	61047870	14284071	80.672	58	610492
MASTER PL-T 18W/827/4P 1CT/5X10BOX	CT / 50		50	55982170	14482771	80.672	58	559845
MASTER PL-T 18W/830/4P 1CT/5X10BOX	CT / 50		50	61076870	14483071	80.672	58	610966
MASTER PL-T 18W/840/4P 1CT/5X10BOX	CT / 50		50	61099770	14484071	80.672	58	611017
MASTER PL-T 26W/827/4P 1CT/5X10BOX	CT / 50		50	55993770	14682771	88.278	64	272171
MASTER PL-T 26W/830/4P 1CT/5X10BOX	CT / 50		50	61120870	14683071	88.278	64	611246
MASTER PL-T 26W/840/4P 1CT/5X10BOX	CT / 50		50	61125370	14684071	88.278	64	611277
MASTER PL-T 32W/827/4P 1CT/5X10BOX	CT / 50		50	55996870	14782771	96.382	70	560018
MASTER PL-T 32W/830/4P 1CT/5X10BOX	CT / 50		50	61128470	14783071	96.382	70	611307
MASTER PL-T 32W/840/4P 1CT/5X10BOX	CT / 50		50	61131470	14784071	96.382	70	611338
MASTER PL-T 42W/827/4P 1CT/5X10BOX	CT / 50		50	56002570	14882771	112.094	83	272195
MASTER PL-T 42W/830/4P 1CT/5X10BOX	CT / 50		50	61134570	14883071	112.094	83	611369
MASTER PL-T 42W/840/4P 1CT/5X10BOX	CT / 50		50	61137670	14884071	112.094	83	611390
MASTER PL-T 57W/830/4P 1CT/5X10BOX	CT / 50		50	61140670	14983071	133.416	101	611420
MASTER PL-T 57W/840/4P 1CT/5X10BOX	CT / 50		50	61145170	14984071	133.416	101	611499

⁴ value description(s): 'CT / 50' = CARTON

Spectral power distribution



Performance diagrams



Cap-Base Overview

