


Box Dimmer Zigbee


Technical data

| | |
|---------------------|----------------------------------|
| Voltage | 100-240VAC 50 Hz |
| Output current | Max. 1.5A |
| Max. dimmer load | 400W |
| Max. thermal loss | 4W |
| Dimming | Trailing edge |
| Exterior dimensions | L: 45.5 mm, W: 45 mm, H: 20.5 mm |
| IP-class | IP20 |
| Material | Plastic |
| Environment | Indoors |
| Warranty | 2 years |
| Approvals | CE |

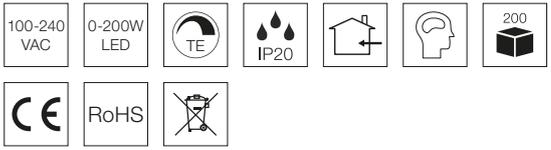

Product information

- Input and output with screw terminals, safe and reliable
- Trailing edge dimming: LED 0-200W / Halogen 0-400W
- Can directly pair to a compatible Zigbee Gateway
- Can be controlled by universal 8-230V input single wire push switch
- Mini size, easy to be installed into a standard 86 x 86 mm wall box
- Radio Frequency: 2.4GHz
- Memory function for dimming

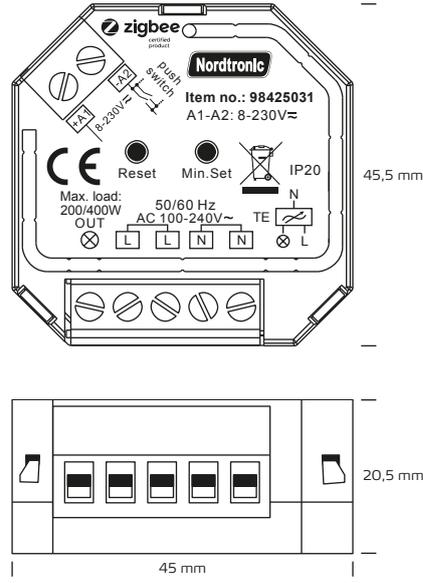

*The drawing is not drawn to scale

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

| Item no. | EAN no. | Colour |
|----------|---------------|--------|
| 98425031 | 5704629000667 | Blue |