


OLBIAe

Surface / Suspended
IP65



LED				IP65				5 years warranty	50,000 hrs L80/B20 Ta=25°C	220-240V 50-60Hz		CE
-----	--	--	--	------	--	--	--	------------------	----------------------------------	---------------------	--	----

on request


OLBIAe

OLBIAe
Surface / Suspended

NET LIGHT OUTPUT	up to 5319 lm
EFFICIENCY	up to 125 lm/W
WIRING	ECG, on request: DALI, 1-10V On request: Emergency kit (1h, 3h)
CCT	4000K / 3000K
CRI	≥ 80 Ra
MATERIALS	
> Housing	Grey polycarbonate (PC), UV stable
> Diffuser	Opal polycarbonate (PC)
> Reflector	Steel sheet, white color (RAL 9003)
> Clips	Polyamide + 15 % glass fibre or Stainless steel + polyamide
LIGHT DISTRIBUTION	Direct
SURFACE FINISH	Grey polycarbonate (PC)
ACCESSORIES	Stainless steel clips



drawing #1

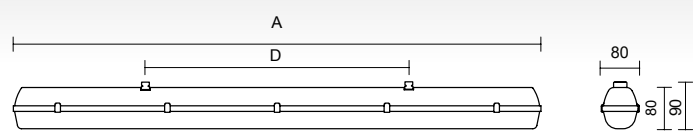

Net lumen output	CCT	Power	Dimensions	Weight	Purchase code
(lm)	(K)	(W)	(mm)	(kg)	
4950	4000	39	A: 1260 D:900	1.90	OLBIAe.120.39.4950.4K.65
4600	3000	39	A: 1260 D:900	1.90	OLBIAe.120.39.4600.3K.65
6600	4000	54	A: 1560 D:900	2.30	OLBIAe.150.54.6600.4K.65
6150	3000	54	A: 1560 D:900	2.30	OLBIAe.150.54.6150.3K.65