



CoreLine Surface-mounted

SM134V LED37S/830 W60L60 IA1 OC

Coreline Surface - 830 warm white - Power supply unit regulating external

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Surface-mounted range of LED products can be used to replace functional luminaires in general lighting applications. The process of selecting, installing and maintaining is so easy – it's a simple switch. ;InterAct Ready luminaires with integrated wireless communications in this family available, to be used with InterAct gateways, sensors and software.

Product data

General Information			
Light source color	830 warm white	Flammability mark	For mounting on normally flammable surfaces
Light source replaceable	No	CE mark	CE mark
Number of gear units	1 unit	ENEC mark	ENEC mark
Driver/power unit/transformer	Power supply unit regulating external	Warranty period	5 years
Driver included	Yes	Constant light output	No
Optic type	Wide beam	Number of products on MCB of 16 A type B	24
Luminaire light beam spread	81°	EU RoHS compliant	Yes
Control interface	Internal (no external connection)	Service tag	Yes
Connection	Push-in connector and pull relief	Product family code	SM134V [Coreline Surface]
Cable	-	Unified glare rating CEN	19
Protection class IEC	Safety class I	Operating and Electrical	
Glow-wire test	Temperature 850 °C, duration 30 s	Input Voltage	220-240 V

CoreLine Surface-mounted

Input Frequency	50 to 60 Hz
Inrush current	22 A
Inrush time	0.275 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	Wireless Dim
----------	--------------

Mechanical and Housing

Housing Material	Steel
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	-
Optical cover/lens finish	Textured
Overall length	597 mm
Overall width	597 mm
Overall height	47 mm
Color	White
Dimensions (Height x Width x Depth)	47 x 597 x 597 mm (1.9 x 23.5 x 23.5 in)

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3700 lm
Luminous flux tolerance	+/-8%
Initial LED luminaire efficacy	104.5 lm/W
Init. Corr. Color Temperature	3000 K

Init. Color Rendering Index	≥80
Initial chromaticity	(0.43, 0.40) SDCM <3
Initial input power	35.4 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L75

Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	Yes

Product Data

Full product code	871869699669000
Order product name	SM134V LED375/830 W60L60 IA1 OC
EAN/UPC - Product	8718696996690
Order code	910925865190
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925865190
Net Weight (Piece)	4.000 kg



Dimensional drawing

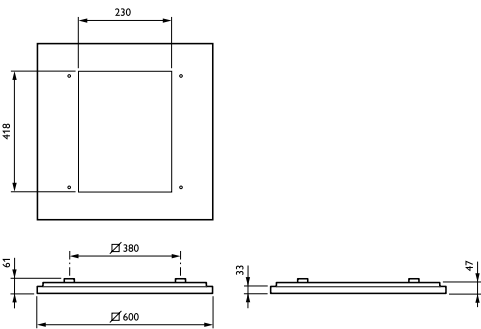

CoreLine Surface-mounted SM134V

CoreLine Surface-mounted

