


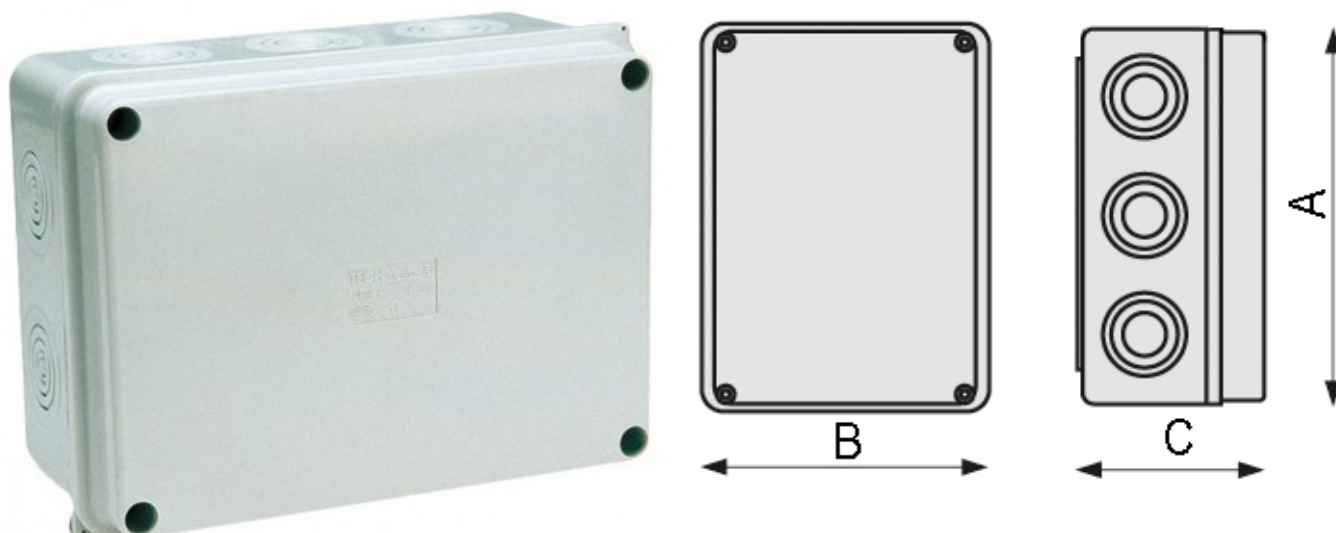

HIL-BOX® enclosure system including diaphragms, screwed cover, 243 x 190 x 90 mm

shock resistant enclosures including **moulded glands** in soft material. Fast locking press-on-cover. Protection IP 65 is assured without any need for cable glands or drilling holes. The injected membranes guarantee a waterproof seal simply by piercing the membrane with the cable and withdraw slightly to archive a wraparound.

protection spec.: IP 65 acc. DIN EN 60529

material: base and lid PP (halogen free), membrane entry rubber (UV resistance)

color: grey RAL 7035

installation temp.: -25 °C up to +60 °C acc. DIN EN 60670

temperature resistance: max. 70 °C acc. DIN EN 60695-10-2

flame protection: 750 °C acc. DIN EN 60695-2-11

ArtNr	55270
A [mm]	243
b [mm]	190
C [mm]	90
Cover	grey
max. Ø Membrane	37
Membranes	12