


Wall mounted receptacle - Part no. 139



- screw terminals
- Products with pilot contact: Part no. + index P

| | |
|-----------------------|-----------------|
| Protection type | IP 67 |
| Ampere | 125A |
| Poles | 4p |
| Voltage | 400V |
| Hertz | 50-60 Hz |
| Earth position | 6h |
| Contact | standard |
| Connection technology | Screw terminals |
| Shutter | |

Std. Pack. 3 Qty.

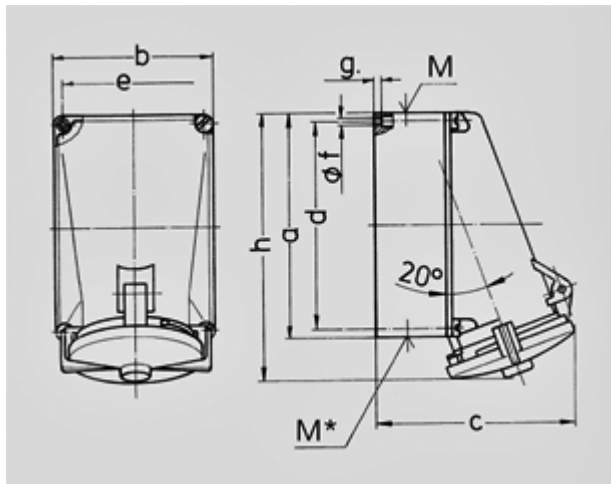

| Drawing | Amp. | 125 | |
|--|-------|-----|-----|
| 1 MB 162 | Poles | 4 | 5 |
| Dim. in mm | a | 264 | 264 |
| | b | 163 | 163 |
| | c | 203 | 203 |
| | d | 240 | 240 |
| | e | 140 | 140 |
| | f | 8,1 | 8,1 |
| | g. | 8 | 8 |
| | h | 313 | 313 |
| | M | 50 | 50 |
| | M* | 50 | 50 |
| Max. cable diam. (mm) | | 38 | 38 |
| Terminal for cond. cross section (mm²) min.-max. | | 25 | 25 |
| | | —35 | —35 |