



Eye_r 125 | 12 W | flood 40° | Ceiling recessed

Also available for ceiling

Technical Specifications


Source lamp	LED 12 W
Total wattage	14.5
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	950 lm (1500 lm*) @ 3000 K
Luminous efficacy	63 lm/W @ 3000 K
McADAM steps	3
Beam	flood 40°
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	I

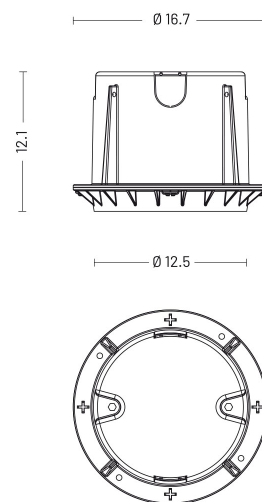


Materials

Body	Die-cast aluminium EN47100
Diffuser	Extra clear glass
Finishing	White - Polyester powder paint

Isolux

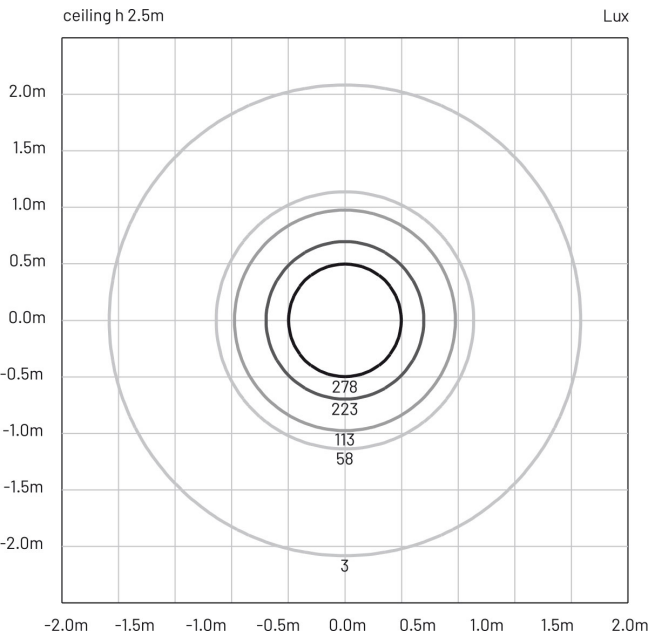

Photometry

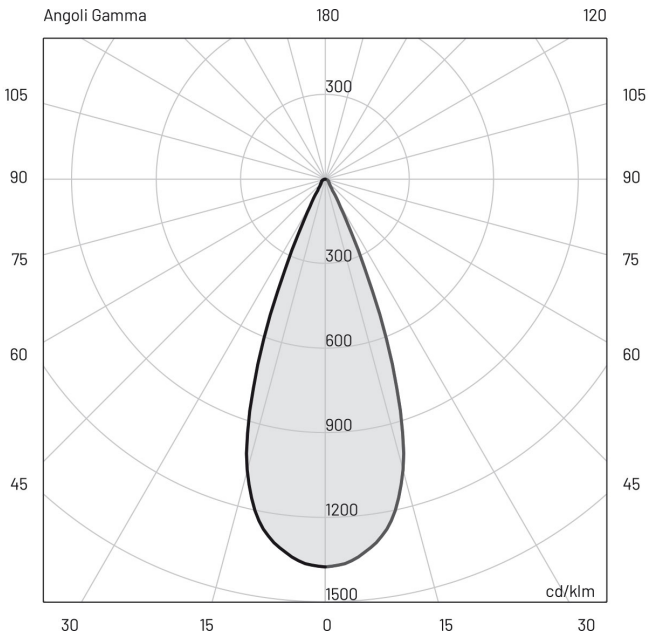

Included accessories

- Housing box

Available accessories

00KEY60	Levelling kit
010829700000	Plastering rim white finish
0303004	Suction cup to screw the glass