

# Bellaluce Led





## D190 D210



- Led bulb with unique design which, thanks to the facets and graceful designs of the glass, creates surprising plays of light without dazzling while maintaining the high flow of 1000lm. The aesthetics and lighting characteristics make the product suitable for domestic environments, living rooms, kitchens, and in commercial environments, restaurants, hotels, in all those places where you want to give a touch of elegance and uniqueness.
- Registered design
- High CRI
- Operating temperature: -20 ° C ~ + 50 ° C
- IC Driver constant current design



— Dimmable with triling edge dimmer



[Privacy & Cookies Policy](#)

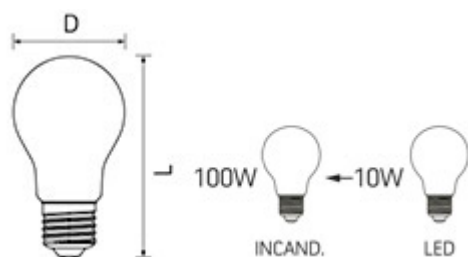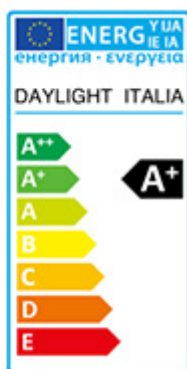

## BELLALUCE bulbs by Daylight Italia

[Privacy & Cookies Policy](#)





**EUIPO**  
EUROPEAN UNION  
INTELLECTUAL PROPERTY OFFICE



**UV STOP**



ENERGY



15.000H

	COD	W		LM	V	K	D	L	CRI	Beam Angle (°)	LEDS	Finishing			start time	warm up
new	700354.00L	10	E27	1000	220-240	2700	190	187	>90	360°	8x26mm	Clear	1	30.000	<0,6	0
new	700355.00L	10	E27	1000	220-240	2700	210	325	>90	360°	8x26mm	Clear	1	30.000	<0,6	0

Bellaluce cod. 700354.00L – 700355.00L

[Dati societari](#)

[Credits](#)

[Privacy policy](#)

© 2021 Daylight Italia. | P.IVA: 07893910963 | Daylight Italia Srl Via Newton, 12 20016 Pero (MI) - Tel. +390231055625 -  
info@daylightitalia.com

