


Fog_1 600 | 24 W | diffuse | Projectors

Also available for ceiling/wall and ceiling/wall recessed

Technical Specifications

Source lamp	LED 24 W
Total wattage	30
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	1020 lm (2680 lm*) @ 3000 K
Luminous efficacy	24 lm/W @ 3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I

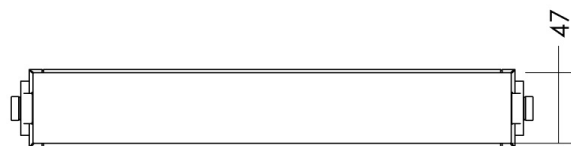


Materials

Body	Extruded aluminium EN AW6060
Diffuser	Opal glass
Finishing	Grey - Polyester powder paint

E (lux)

H(m)	lux (3000 K)	Ø(m)
1.00	338	3.21
2.00	85	6.42
3.00	38	9.62
4.00	21	12.83
5.00	14	16.04

Photometry

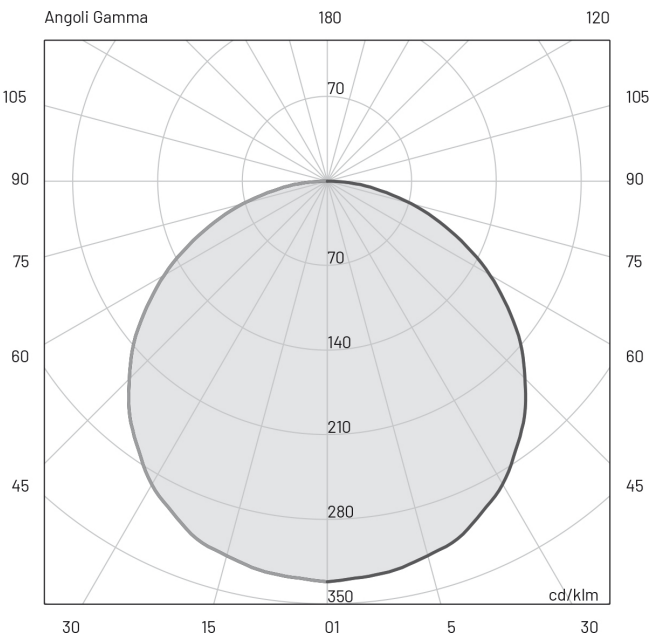

Included accessories

-	1 m length cable -05RN-F
-	Fixing kit short (7,5 cm)
-	Single connection IP68

Available accessories

00KEYFGL.250_	Fixing kit long (25 cm) Fixing kit long (25cm)
00KEYFGL.150_	Fixing kit medium (15 cm) Fixing kit medium (15cm)