



- AC/DC Current, allows work with renewable.
- Double injection housing which facilitates the grip and handling of the clamp.
- True RMS.



PRO



More info

C-LOGIC 8500

TRMS AC/DC clamp meter 1000A

Item Code: CLOGIC8500CBINT

Prev. Code: 1000004519

EAN Code: 8435394775531

UPC Code: 810053671283


CONTENTS




MAIN APPLICATIONS



DOMESTIC

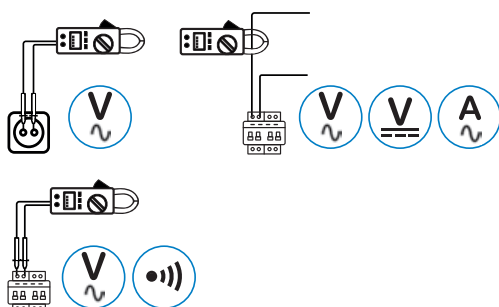

INDUSTRIAL

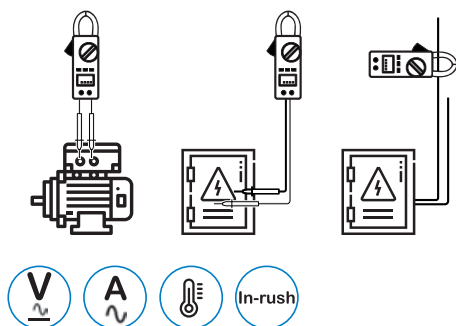

SPECIFICATIONS

AC VOLTAGE

750V

DC VOLTAGE

1000V

AC CURRENT

1000A

DC CURRENT

1000A

INRUSH CURRENT

1000A

RESISTANCE

60MΩ

CAPACITANCE

100mF

FREQUENCY (A/V)

1000Hz/10kHz

FREQUENCY (Hz/Duty)

10MHz

DUTY CYCLE

0.1%~99.9%

DISPLAY COUNTS

6000



40mm
1.6"

TRMS



H

Apo



NCV

INRUSH

FEATURES

Auto Ranging		•
Manual Ranging		•
APO	Auto Power OFF	•
REL	Relative Measurement	•
Diode	Open Voltage	3.2V
Continuity Buzzer	<50Ω	•
Data Hold		•
MAX/MIN		•
LBD	Low Battery Display	•
True RMS	True Root Mean Square	•
Display Backlight		•
Work light		•
Inrush	Inrush Current Measurement	•


General

Power Supply	1×9V 6F22 Battery included
Product Size	238mm×92mm×50mm/9.37"×3.6"×1.9"
Product Weight	386g/0.85lb
Certificate	RoHs, CE, ETL
Safety Rating	CAT III 1000. CAT IV 600V

PACKAGING & LOGISTICS INFORMATION

HS Code: 90303200


Carton box




A: 235 mm / 9.25 in
B: 60 mm / 2.36 in
C: 30 mm / 1.18 in
D: 140 mm / 5.51 in
A+C: 185 mm / 7.28 in



Export carton



Pallet



+ 15 kg / 33.06 lb from pallet